



REV	DATE	MODIFY

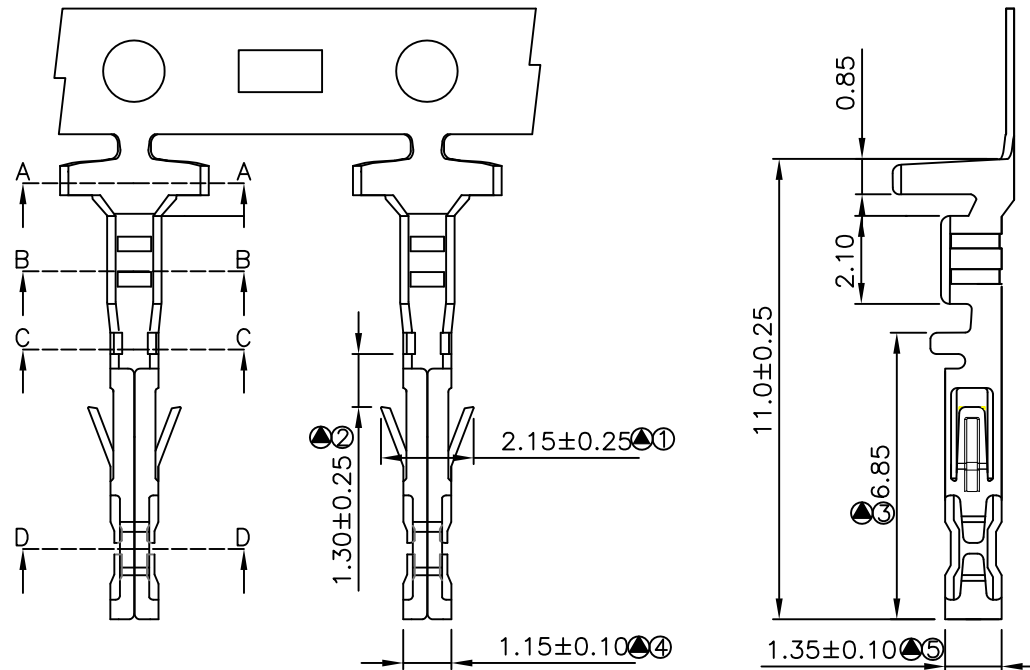


- * Used in ZH-5750-H crimp housing
- * Accepts AWG #24~30 Wire Range
- * Insulation O.D.= 1.10mm (max)
- * Material : Brass or Phosphor bronze
- * Finished: Tin-Plated or Gold-Plated
- * Qty/Reel: 10,000 PCS
- * Thickness: 0.20mm

ZH-5750- $\frac{T}{1}\frac{X}{2}\frac{X}{3}\frac{X}{4}\frac{S}{5}\frac{T}{6}$


- 1 T=Terminal
2 Plated:
 T=Tin G=Gold
3 Plated Method:
 A: Plated before stamping
 B: Stamping before plated
4 Material:
 □BRASS
 P:Phosphor bronze
5 S: Low Heel




SEC:A-A



SEC:B-B



SEC:C-C

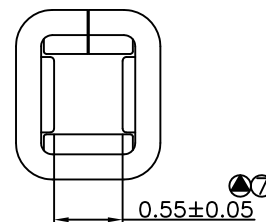

SEC:D-D
SC 3:1

标示“”的尺寸重点确认

TOLERANCE		ZH Connector Zen High Precision Industrial Ltd			
X.	--				
X.X	±0.25				
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR	--	TITLE			
APPROVALS		3.00mm (.118") Pitch Crimp Terminal			
DRAWN	TOMA	VIEW	SCALE	PART NO.	REV.
	21-SEP-2015		1:1	ZH-5750-TXXXST	AO
CHECKED		UNIT	SIZE	DWG NO.	SHEET
APPROVED		MM	A4	TB1-150913	1 OF 1