

RoHS2.0 compliant

REV	DATE	MODIFY

Features:



- * Used in ZH-5750-H crimp housing
- * Accepts AWG #16~22 Wire Range
- * Insulation O.D.= 2.10mm (max)
- * Material : Brass or Phosphor bronze
- * Finished: Tin-Plated or Gold-Plated
- * Qty/Reel: 10,000 PCS
- * Thickness: 0.20mm

Ordering information:


ZH-5750-T X X X L T
1 2 3 4 5 6

- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
□BRASS
P:Phosphor bronze
- 5 L: High Heel
- 6 T:新型端


标示“”的尺寸重点确认

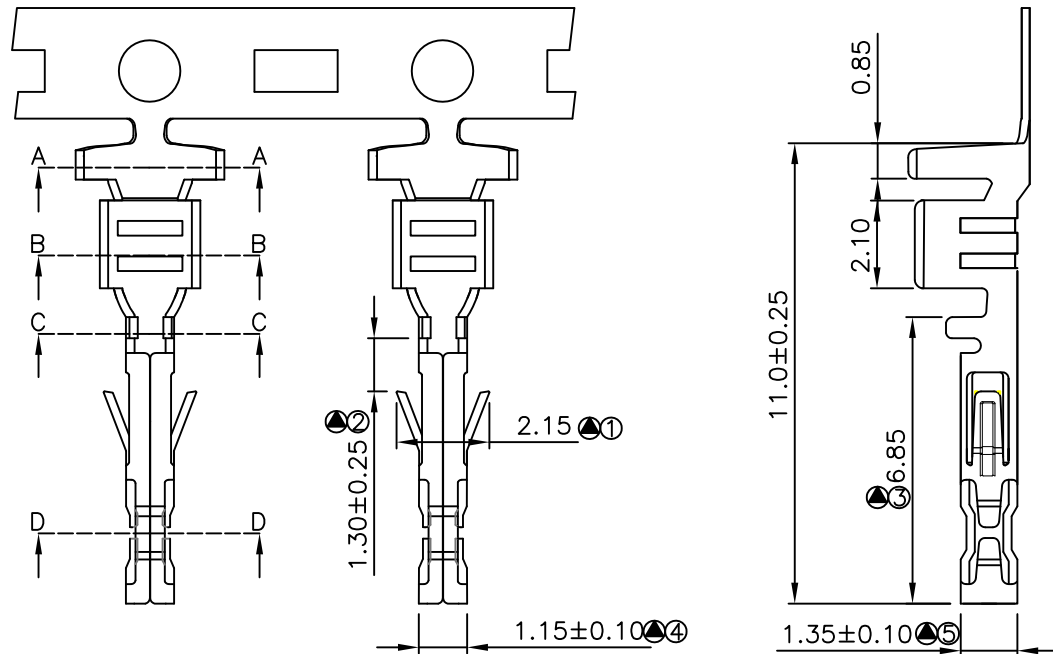


SEC:A-A



SEC:B-B



SEC:C-C

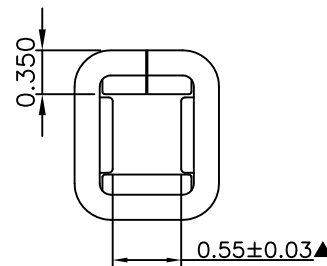

SEC:D-D
SC 3:1



TOLERANCE		 Zen High Precision Industrial Ltd			
X.	---				
X.X	±0.25	TITLE 3.00mm (.118") Pitch Crimp Terminal			
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR	---	APPROVALS			
DRAWN	TOMA	VIEW	SCALE	PART NO.	REV.
CHECKED	21-SEP-2015		1:1	ZH-5750-TXXXLT	A0
APPROVED		UNIT	SIZE	DWG NO.	SHEET
		MM	A4	TB1-150913	1 OF 1