

RI E363554

RoHS2.0 compliant

REV	DATE	MODIFY


Features:

- * Available in 02 through 15 Circuits
- * Material: Nylon 66 UL94V-2
- * Accepts ZH-1000B-T Crimp Terminal
- * Color: White




Ordering information:

ZH-1000B-H XX
1 2

- 1 H=Housing
2 No. of Circuits 02~15

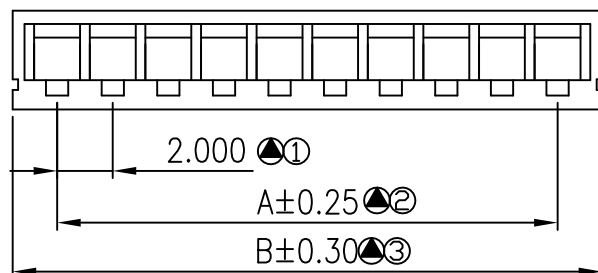

Circuits	Dimension mm		
	A	B	
2	2.0	5.20	
3	4.0	7.20	
4	6.0	9.20	
5	8.0	11.20	
6	10.0	13.20	
7	12.0	15.20	
8	14.0	17.20	
9	16.0	19.20	
10	18.0	21.20	
11	20.0	23.20	
12	22.0	25.20	
13	24.0	27.20	
14	26.0	29.20	
15	28.0	31.20	

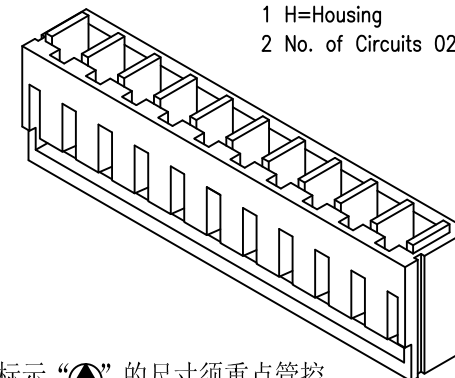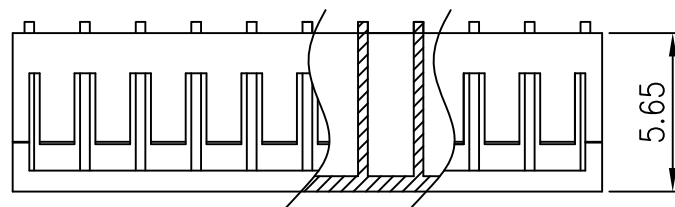






标示“④”的尺寸须重点管控



TOLERANCE		ZH Connector Zen High Precision Industrial Ltd			
X.	--				
X.X	±0.30				
X.XX	±0.20				
X.XXX	±0.10				
ANGULAR	--	TITLE			
		2.00mm (.079") Pitch Housing			
APPROVALS					
DRAWN	TOMA	VIEW	SCALE	PART NO.	REV.
21-MAR-2014			F	ZH-1000B-HXX	A0
CHECKED		UNIT	SIZE	DWG NO.	SHEET
APPROVED		mm	A4	H2-140305	1 OF 1

RoHS2.0 compliant

REV	DATE	MODIFY

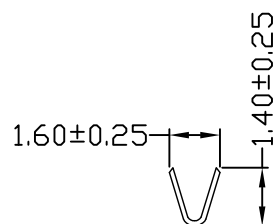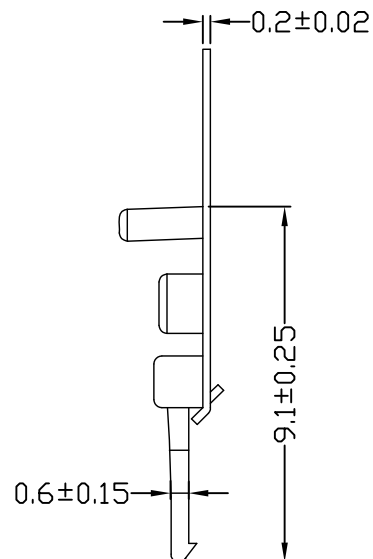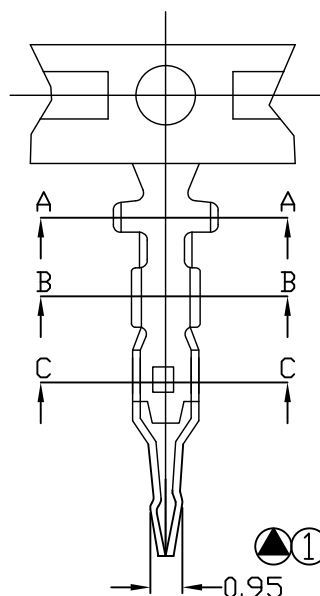

A-A SECTION

B-B SECTION

C-C SECTION

Features:

- * Used in ZH-1000B-HXX Series Housing
- * Accepts AWG #26~28 Wire Range
- * Insulation O.D.= 1.30 mm(max)
- * Material : Brass or Phosphor Bronze
- * Finish : Tin-Plated or Gold-Plated
- * Qty/Reel : 10,000 PCS
- * Thickness: 0.2mm

Ordering information:

ZH- 1000B-T X X X
1 2 3 4

- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
□BRASS
P:Phosphor bronze

标示“”的尺寸须重点管控

TOLERANCE		ZH Connector Zen High Precision Industrial Ltd		
X.	--	TITLE 2.0mm (.079") Pitch Crimp Terminal		
X.X	±0.20			
X.XX	±0.15			
X.XXX	±0.10			
ANGULAR	--			
APPROVALS		VIEW	SCALE	PART NO.
DRAWN	TOMA		F	ZH-1000B-TXXX
CHECKED	21-MAR-2014			
APPROVED		UNIT	SIZE	DWG NO.
		MM	A4	T2-140306
				REV. A0
				SHEET 1 OF 1

