

RU[®] E363554

RoHS2.0 compliant

REV	DESCRIPTION	DATE

Features:

- * Available in 02 through 15 Circuits
- * Material: Nylon 66 UL94V-2
- * Accepts ZH-1000BR-T Crimp Terminal
- * Color: White

Ordering information:

ZH-1000BR-H XX
1 2

- 1 H=Housing
2 No. of Circuits 02~15

Circuits	Dimension mm	
	A	B
2	2.0	5.20
3	4.0	7.20
4	6.0	9.20
5	8.0	11.20
6	10.0	13.20
7	12.0	15.20
8	14.0	17.20
9	16.0	19.20
10	18.0	21.20
11	20.0	23.20
12	22.0	25.20
13	24.0	27.20
14	26.0	29.20
15	28.0	31.20

标示“”的尺寸须重点管控

TOLERANCE		 Zen High Precision Industrial Ltd		
X.	±0.25			
X.X	±0.20			
X.XX	±0.15			
X.XXX	±0.10			
ANGULAR	--			
APPROVALS		TITLE		
DRAWN	TOMA	2.00mm (.079") Pitch Housing		
CHECKED	06-MAR-2014			
APPROVED		VIEW	SCALE	PART NO.
			F	ZH-1000BR-HXX
		UNIT	SIZE	DWG NO.
		mm	A4	H2-140303
				REV.
				A0
				SHEET
				1 OF 1



RoHS2.0 compliant

REV	DATE	MODIFY

Features:


- * Used in ZH-1000BR-HXX Series Housing
- * Accepts AWG #26~28 Wire Range
- * Insulation O.D.= 1.40 mm(max)
- * Material : Brass or Phosphor Bronze
- * Finish : Tin-Plated or Gold-Plated
- * Qty/Reel : 10,000 PCS
- * Thickness: 0.2mm

Ordering information:

ZH- 1000BR-T X X X
1 2 3 4


- 1 T=Terminal
2 Plated:
T=Tin G=Gold
3 Plated Method:
A: Plated before stamping
B: Stamping before plated
4 Material:
□BRASS
P:Phosphor bronze

标示“”的尺寸须重点管控



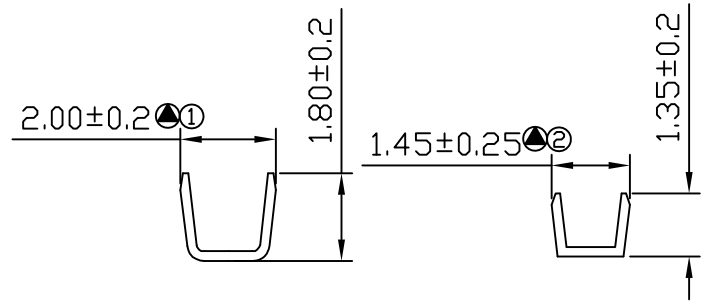


A-A SECTION

C-C SECTION

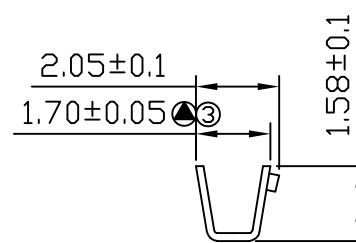

D-D SECTION

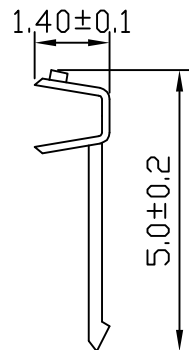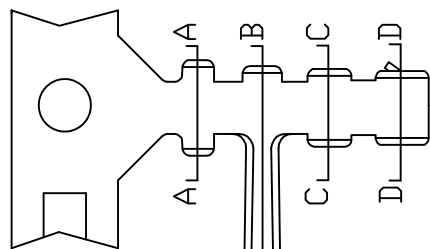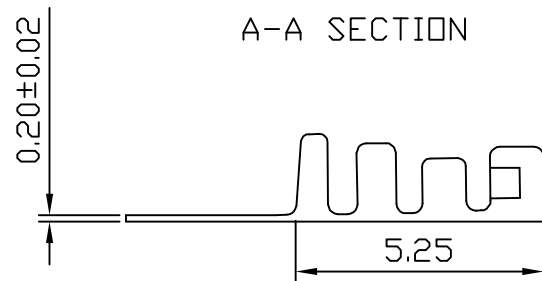

B-B SECTION

0.85±0.1 



TOLERANCE		 Zen High Precision Industrial Ltd			
X.	--	TITLE 2.0mm (.079") Pitch Crimp Terminal			
X.X	±0.20				
X.XX	±0.15				
X.XXX	±0.10				
ANGULAR	--				
APPROVALS		VIEW	SCALE	PART NO.	REV.
DRAWN	TOMA 06-MAR-2014		F	ZH-1000BR-TXXX	A0
CHECKED		UNIT	SIZE	DWG NO.	SHEET
APPROVED		MM	A4	T2-140304	1 OF 1