

RI E363554

RoHS2.0 compliant

REV	DATE	MODIFY





Features:

- * Available in 10 Through 50 Circuits
- * Material: Nylon66 UL94V-0
- * Accepts ZH-0600-T Crimp Terminal
- * Mates With ZH-0600D-SXXS or ZH-0600D-SXXR Series Wafer
- * Color: White

Ordering information:

ZH-0600D - $\frac{H}{1} \frac{XX}{2}$

- 1 H=Housing
2 No. of Circuits 10~50

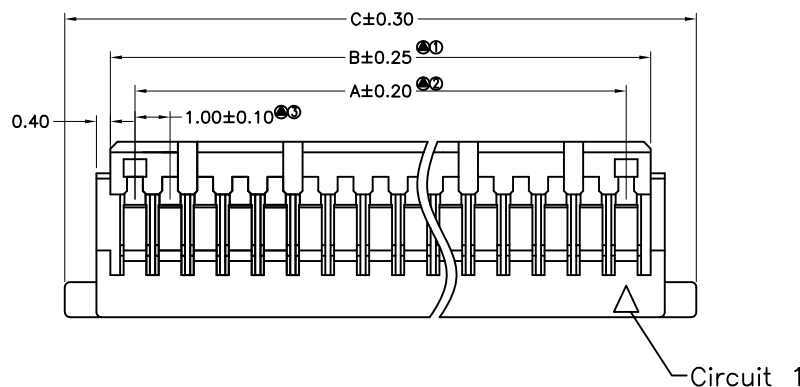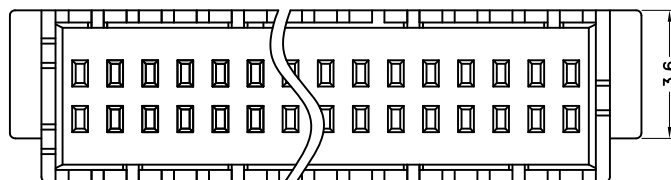

Circuits	Dimension mm		
	A	B	C
10	4.00	5.42	8.00
18	8.00	9.40	12.00
20	9.00	10.40	13.00
30	14.00	15.40	18.00
40	19.00	20.40	23.00
50	24.00	25.40	28.00

标示“”的尺寸须重点管控

TOLERANCE X. -- X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 ANGULAR --		Zen High Precision Industrial Ltd		
APPROVALS DRAWN TOMA 19-APR-2019 CHECKED APPROVED		TITLE 1.00mm (.039") Pitch Double Row Housing		
VIEW 		SCALE 1:1	PART NO. ZH-0600D-HXX	REV. A0
UNIT MM		SIZE A4	DWG NO. H17-190411	SHEET 1 OF 1



RoHS2.0 compliant

REV	DATE	MODIFY

Features:

- * Used in ZH-0600-H Series Housing
- * Accepts AWG #28~32 Wire Range
- * Insulation O.D.= 0.80 mm(max)
- * Material : Phosphor Bronze or Brass
- * Finish : Gold-Plated or Tin-Plated
- * Qty/Reel : 15,000 PCS
- * Thickness: 0.12mm

Ordering information:




ZH-0600-T X X X X X
I 2 3 4 5

- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
□Brass
P:Phosphor bronze
- 5 鍍金膜厚表示碼:


1	2	3	4	5	6	7
1u"	10u"	30u"	3u"	150u"	5u"	15u"

标示“⊙”的尺寸须重点管控


TOLERANCE		ZH Connector Zen High Precision Industrial Ltd							
X.	--								
X.X	±0.25								
X.XX	±0.15								
X.XXX	±0.05								
ANGULAR	--	TITLE 1.00mm (.039") Pitch Crimp Terminal							
APPROVALS									
DRAWN	TOMA 04-NOV-2018					VIEW 	SCALE 1:1	PART NO. ZH-0600-TXXXX	REV. A0
CHECKED						UNIT MM	SIZE A4	DWG NO. T6-181105	SHEET 1 OF 1
APPROVED									

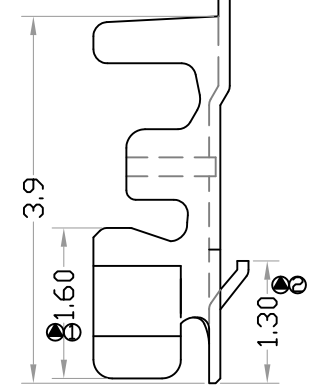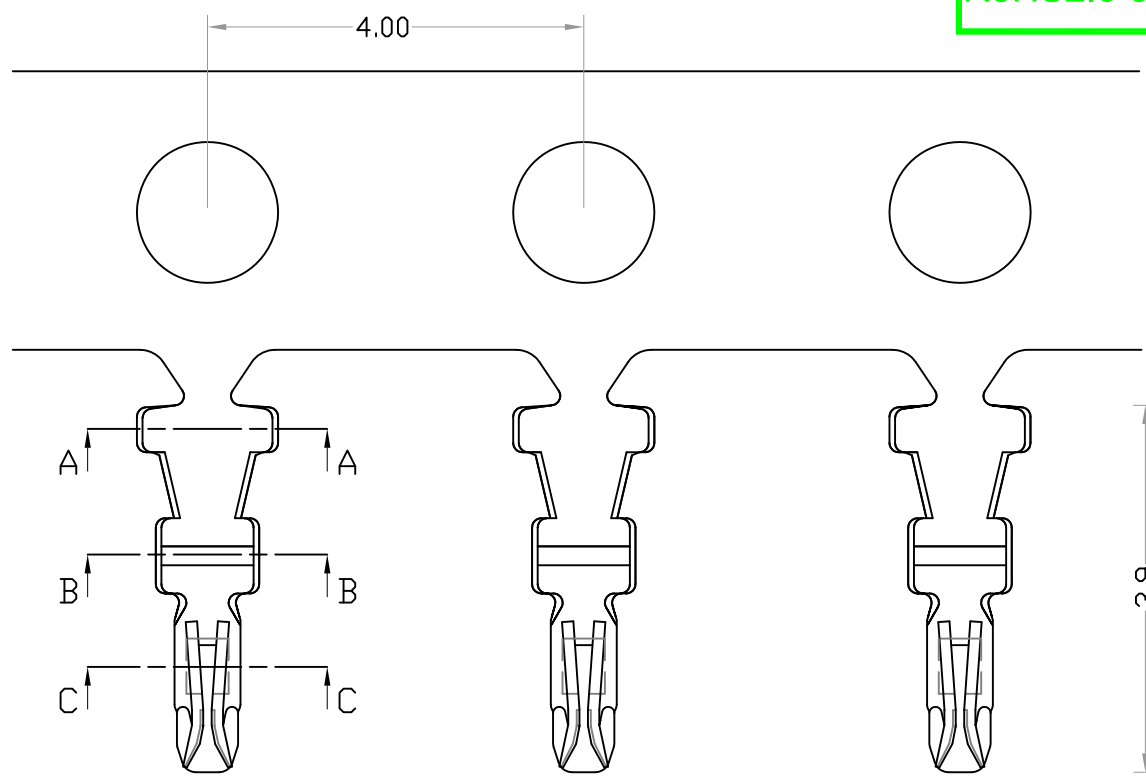

SEC A-A



SEC B-B

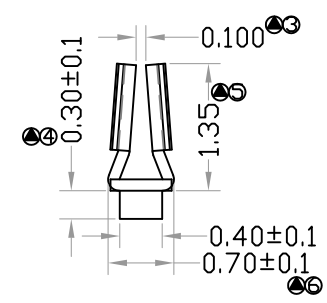

SEC C-C

