

RoHS2.0 compliant

REV	DATE	MODIFY

Features:


- * Available in 2*10/2*15/2*20/2*25 Circuits
- * Material: Nylon66 94V-0
- * Accepts ZH-1006-T Crimp Terminal
- * Mates with ZH-1006D-SXX Series SMT
- * Color: Natural

Ordering information:



ZH-1006D- $\frac{H}{1}\frac{L}{2}\frac{XX}{3}$

- 1 H=Housing
2 L: With Lock Catch
2 No. of Circuits 2*10/2*15
/2*20/2*25

标示“”的尺寸须重点管控

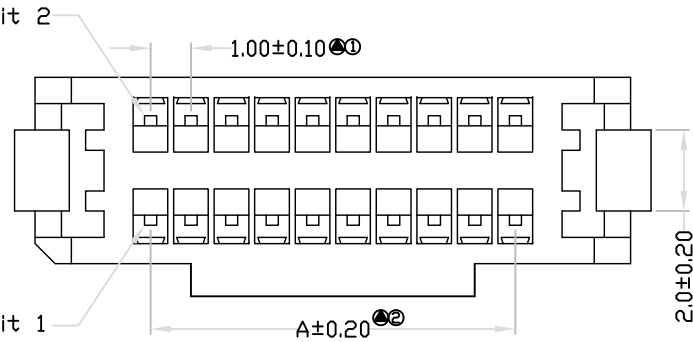

Poles	A	B	C	D
2*10	9.00	11.30	14.70	15.70
2*15	14.00	16.30	19.70	20.70
2*20	19.00	21.30	24.70	25.70
2*25	24.00	26.30	29.70	30.70

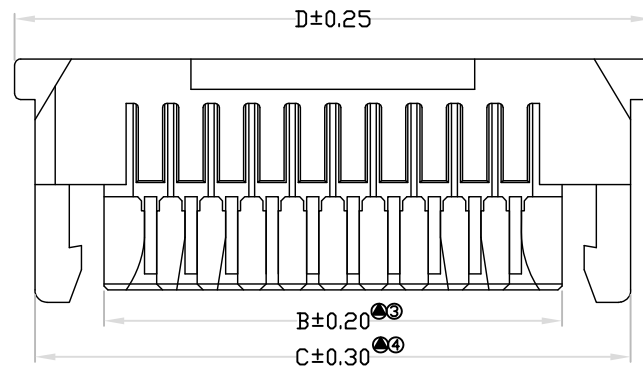

TOLERANCE		 Zen High Precision Industrial Ltd		
X.	--			
X.X	±0.25	TITLE 1.00mm (.039") Pitch Double Row Housing		
X.XX	±0.15			
X.XXX	±0.05			
ANGULAR	--			
APPROVALS		VIEW	SCALE	PART NO.
DRAWN	TOMA 01-APR-2020		F	ZH-1006D-HLXX
CHECKED		UNIT	SIZE	DWG NO.
APPROVED		MM	A4	
				REV. X0
				SHEET 1 OF 1

RoHS2.0 compliant

REV	DATE	MODIFY

Features:

- * Used in ZH-1006-H&ZH-1006D-H Series Housing
- * Accepts AWG #28~32 Wire Range
- * Insulation O.D.= 0.80 mm(max)
- * Material : Phosphor Bronze
- * Finish : Gold-Plated or Tin-Plated
- * Thickness: 0.12mm




Ordering information:

ZH-1006- $\frac{T}{1} \frac{X}{2} \frac{X}{3} \frac{P}{4} \frac{X}{5}$


- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
P:Phosphor bronze
- 5 X: 鍍金膜厚

	1	2	3	4	5	6	7
G/F	1u"	10u"	30u"	3u"	150u"	5u"	15u"

标示“”的尺寸须重点管控

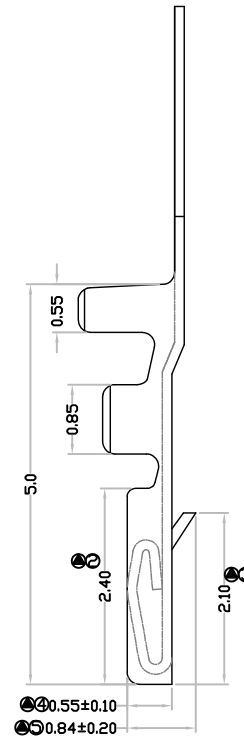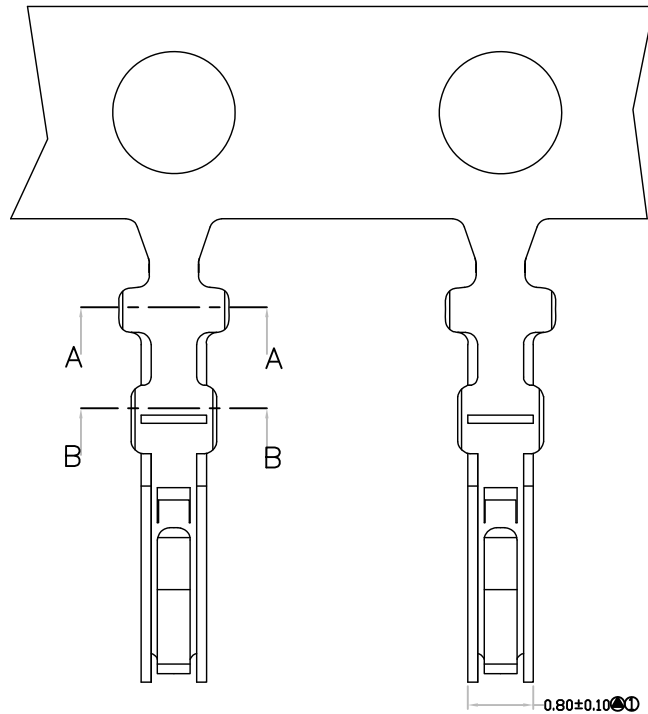

SEC: A-A



SEC: B-B



TOLERANCE		 Zen High Precision Industrial Ltd			
X.X	±0.25	TITLE 1.00mm (.039") Pitch Crimp Terminal			
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR	--				
APPROVALS					
DRAWN	TOMA	VIEW	SCALE	PART NO.	REV.
	01-APR-2020		1:1	ZH-1006-TXXPX	A0
CHECKED		UNIT	SIZE	DWG NO.	SHEET
		MM	A4		1 OF 1
APPROVED					