
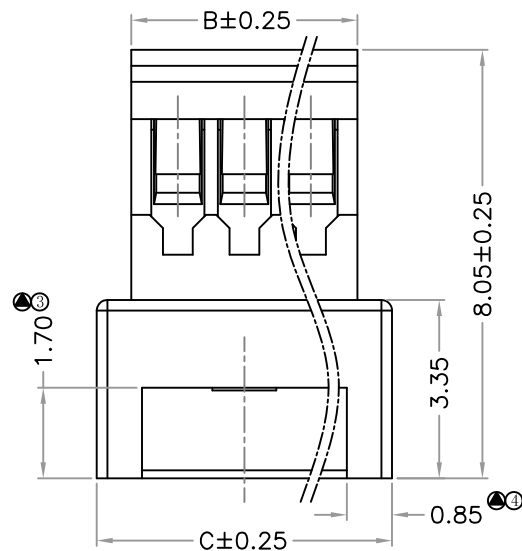
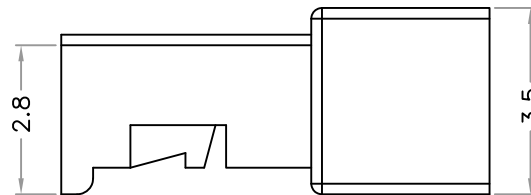


RoHS2.0 compliant

REV	DATE	MODIFY



Features:

- * Available in 02 through 10 Circuits
- * Material: Nylon66 UL94V-0
- * Accepts ZH-0800-TMXX Crimp Terminal
- * Mates with ZH-0800-HXXX
- * Color Natural

Ordering information:

ZH-0800- $\frac{H}{1}$ $\frac{F}{2}$ $\frac{XX}{3}$ - $\frac{X}{4}$

- 1 H=Housing
2 F Female / 母壳
3 No. of Circuits 2~10PIN
4 Color:

Natural	A:Black	B:Brown	C:Red
D:Orange	E:Yellow	F:Green	G:Blue
H:Purple	I:Gray	J:White	K:Pink

"PIN"	A	B	C
2PIN	1.25	3.00	4.30
3PIN	2.50	4.25	5.55
4PIN	3.75	5.40	6.80
5PIN	5.00	6.65	8.05
6PIN	6.25	7.90	9.30
7PIN	7.50	9.15	10.55
8PIN	8.75	10.40	11.80
9PIN	10.00	11.65	13.05
10PIN	11.25	12.90	14.30

标示“●”的尺寸需重点管控

TOLERANCE		Zen High Precision Industrial Ltd			
X.X	±0.25	TITLE 1.25mm(.049") Pitch Housing			
X.XX	±0.20				
X.XXX	±0.10				
ANGULAR	--				
APPROVALS		VIEW	SCALE	PART NO.	REV.
DRAWN	TOMA		1:1	ZH-0800-HFXX-X	AO
CHECKED	06-AUG-2018				
APPROVED					
		UNIT	SIZE	DWG NO.	SHEET
		mm	A4	H17-180822	1 OF 1



RoHS2.0 compliant

REV	DATE	MODIFY
A1	2019/8/13	TOMA





Features:

- * Mates with ZH-0800-HFXX Series Housing
- * Accepts AWG #28~32 Wire Range
- * Insulation O.D.=1.0mm(max)
- * Material:Phosphor Bronze or Brass
- * Finish:Tin-Plated or Gold-Plated
- * Thickness: 0.15mm

Ordering information:

ZH-0800-T M X X X
1 2 3 4 5

- 1 T=Terminal
2 M=Male
3 Plated:
T=Tin G=Gold
4 Plated Method:
A: Plated before stamping
B: Stamping before plated
5 Material:
□BRASS
P:Phosphor bronze

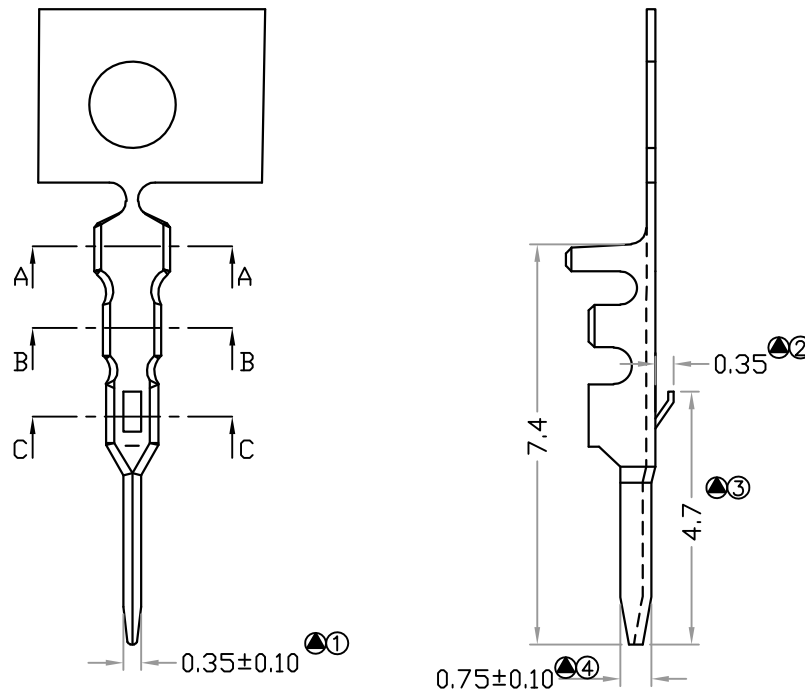

标示“”的尺寸须重点管控

TOLERANCE		ZH Connector Zen High Precision Industrial Ltd.			
X.	--				
X.X	±0.25	TITLE 1.25 mm (.049") Pitch Crimp Terminal			
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR	--				
APPROVALS					
DRAWN	TOMA	VIEW	SCALE	PART NO.	REV.
	09-AUG-2018		F	ZH-0800-TMXXX	A1
CHECKED		UNIT	SIZE	DWG NO.	SHEET
APPROVED		MM	A4	T23-180810	1 OF 1

