


REV	DATE	MODIFY

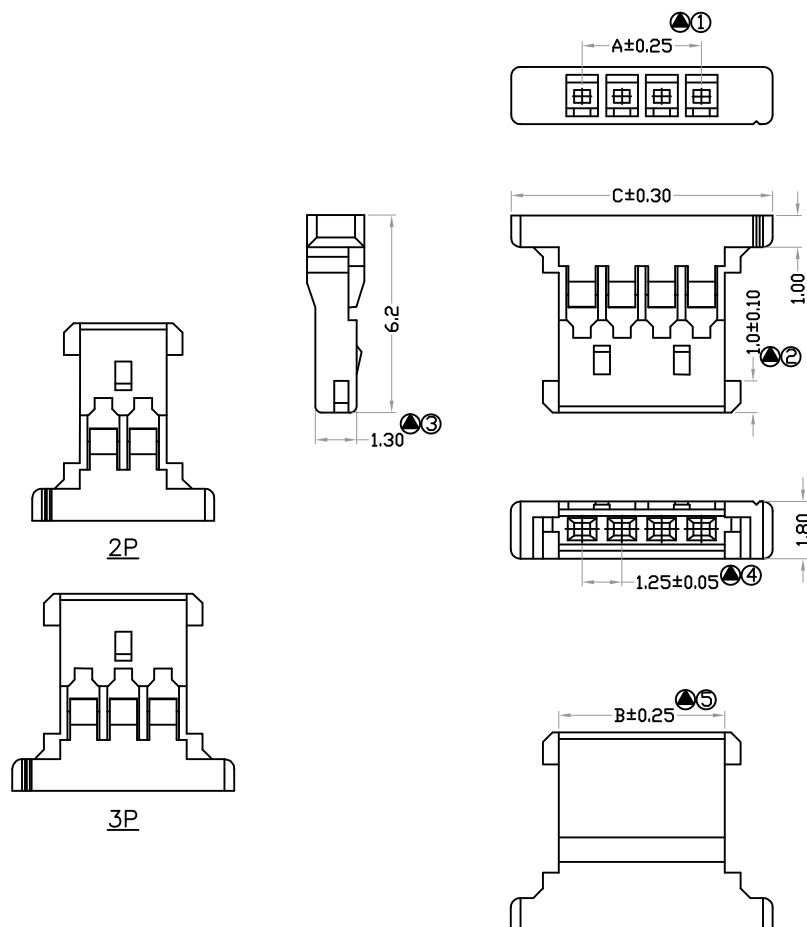

P	Dimensions		
	A	B	C
02P	1.25	2.72	5.72
03P	2.50	3.97	6.97
04P	3.75	5.22	8.22
05P	5.00	6.47	9.47
06P	6.25	7.72	10.72
07P	7.50	8.97	11.97
08P	8.75	10.22	13.22
09P	10.00	11.47	14.47
10P	11.25	12.72	15.72
11P	12.50	13.97	16.97
12P	13.75	15.22	18.22
14P	16.25	17.72	20.72
15P	17.50	18.97	21.97
16P	18.75	20.22	23.22
20P	23.75	25.22	28.22
30P	36.25	37.72	40.72

Features:

- * Available in 1X2 through 1X30 Circuits
- * Material: Nylon 66 UL94V-0
- * Accepts ZH-0850-T Crimp Terminal
- * Mates with ZH-0850-WXXS or ZH-0850-WXXR Series Wafer
- * Color: White

Ordering information:

ZH-0850-H XX
I 2

- 1 H=Housing
- 2 No. of Circuits 02~30






标示“”的尺寸须重点管控



TOLERANCE		 Zen High Precision Industrial Ltd			
X.	--				
X.X	±0.25				
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR	--				
APPROVALS		TITLE			
DRAWN	TOMA	2.0mm (.079") Pitch Housing			
	30-OCT-2018				
CHECKED		VIEW	SCALE	PART NO.	REV.
			1:1	ZH-0850-HXX	AO
APPROVED		UNIT	SIZE	DWG NO.	SHEET
		MM	A4	H17-181016	1 OF 1

RoHS2.0 compliant

REV	DATE	MODIFY

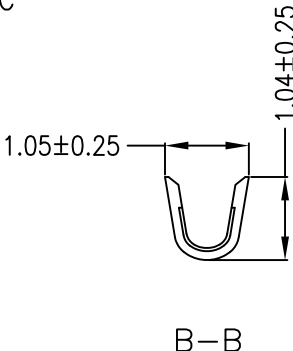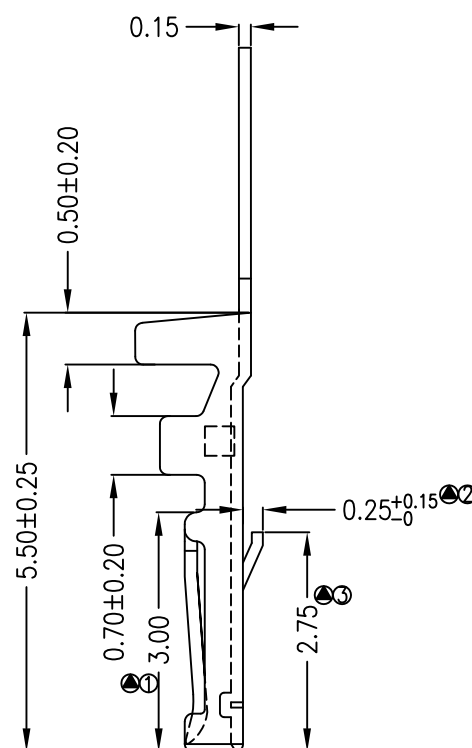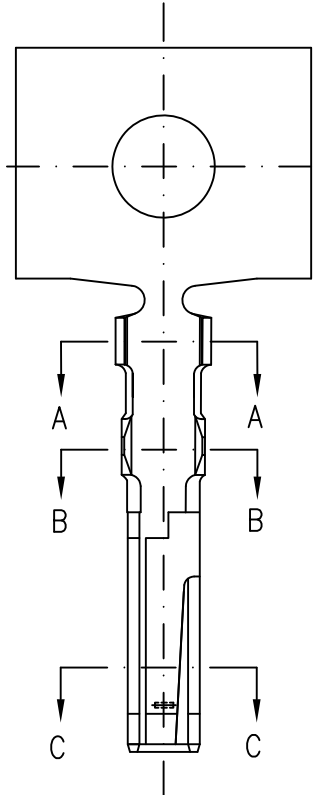

Features:

- * Used in ZH-0850-HXX serie socket
- * Accepts AWG #28~32 wire range
- * Insulation O.D.=1.0mm(max)
- * Material: Phosphor bronze or Brass
- * Finish: Gold Plated or Tin Plated
- * Qty/reel: 15,000pcs
- * Thickness: 0.15mm

Ordering information:

ZH-0850-T X X X
1 2 3 4

- 1 T=Terminal
2 Plated: T=Tin G=Gold
3 Plated Method:
A: Plated before stamping
B: Stamping before plated
4 Material:
□: BRASS
P: Phosphor bronze

标示“”的尺寸须重点管控

TOLERANCE		 Zen High Precision Industrial Ltd			
X.	--				
X.X	±0.25	TITLE 1.25mm(.049")Pitch Terminal			
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR	--				
APPROVALS					
DRAWN	TOMA	VIEW	SCALE	PART NO.	REV.
	23-OCT-2018		1:1	ZH-0850-TXXX	AO
CHECKED		UNIT	SIZE	DWG NO.	SHEET
		MM	A4	T17-181013	1 OF 1
APPROVED					

