

RoHS2.0 compliant

REV	DATE	MODIFY



Features:

- * Available in 02 through 15 Circuits
- * Material: Nylon 66 UL94V-0
- * Accepts ZH-1000Z-T or ZH-1000ZR-T
- Crimp Terminal
- * Color: White



Ordering information:

ZH-1000Z-H $\frac{X}{1} \frac{X}{2}$

- 1 H=Housing
2 No. of Circuits 02~15

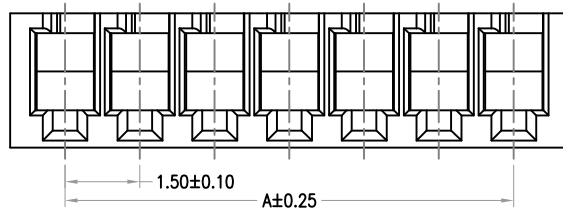

P.C.B LAYOUT

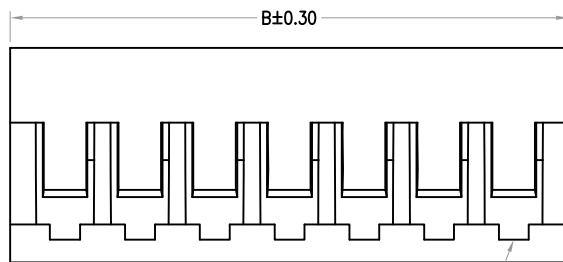

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
B1502HR-02P	1.50	3.70
B1502HR-03P	3.00	5.20
B1502HR-04P	4.50	6.70
B1502HR-05P	6.00	8.20
B1502HR-06P	7.50	9.70
B1502HR-07P	9.00	11.20
B1502HR-08P	10.50	12.70
B1502HR-09P	12.00	14.20
B1502HR-10P	13.50	15.70
B1502HR-11P	15.00	17.20
B1502HR-12P	16.50	18.70
B1502HR-13P	18.00	20.20
B1502HR-14P	19.50	21.70
B1502HR-15P	21.00	23.20

TOLERANCE		ZH Connector Zen High Precision Industrial Ltd			
X.X	±0.25	TITLE 1.5mm (.059”) Pitch Housing			
X.XX	±0.15				
X.XXX	±0.10				
ANGULAR	--				
APPROVALS					
DRAWN	TOMA	VIEW	SCALE	PART NO.	REV.
	10-SEP-2019		1:1	ZH-1000Z-HXX	A0
CHECKED		UNIT	SIZE	DWG NO.	SHEET
		mm	A4	H6-190906	1 OF 1
APPROVED					



RoHS2.0 compliant

REV	DATE	MODIFY




Features:

- * Used in ZH-1000Z-HXX Series Housing
- * Accepts AWG #26~30 Wire Range
- * Insulation O.D.= 1.30 mm(max)
- * Material : Brass or Phosphor Bronze
- * Finish : Tin-Plated or Gold-Plated
- * Thickness: 0.2mm

Ordering information:

ZH- 1000Z-T X X X
1 2 3 4

- 1 T=Terminal
2 Plated:
T=Tin G=Gold
3 Plated Method:
A: Plated before stamping
B: Stamping before plated
4 Material:
□BRASS
P:Phosphor bronze

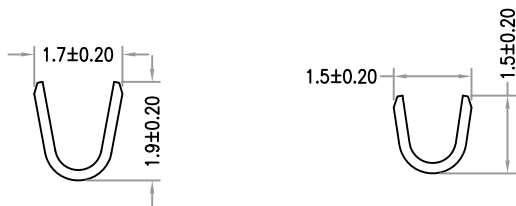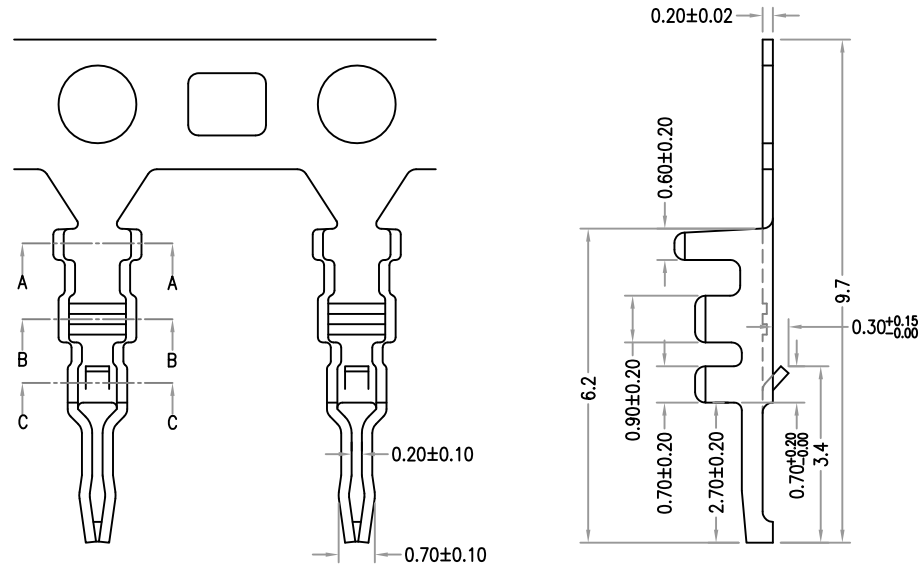

SECTION A-A

SECTION B-B

SECTION C-C

标示“”的尺寸须重点管控

TOLERANCE		Zen High Precision Industrial Ltd			
X.	--	TITLE 1.5mm (.059") Pitch Crimp Terminal			
X.X	± 0.25				
X.XX	± 0.15				
X.XXX	± 0.05				
ANGULAR	--				
APPROVALS		VIEW	SCALE	PART NO.	REV.
DRAWN	TOMA		F	ZH-1000Z-TXXX	AO
CHECKED		UNIT	SIZE	DWG NO.	SHEET
APPROVED		MM	A4	T6-190905	1 OF 1

