

RI E363554

RoHS2.0 compliant

REV	DATE	MODIFY







Features:

- * Available in 02 through 16 Circuits
- * Material: Nylon 66 UL94V-0
- * Accepts ZH-1000AR-T Crimp Terminal
- * Color: White

Ordering information:

ZH-1000AR-H XX
I 2

- 1 H=Housing
2 No. of Circuits 02~16

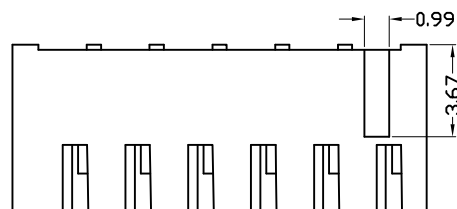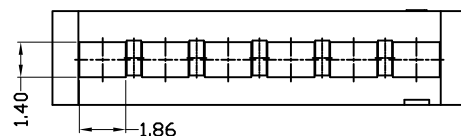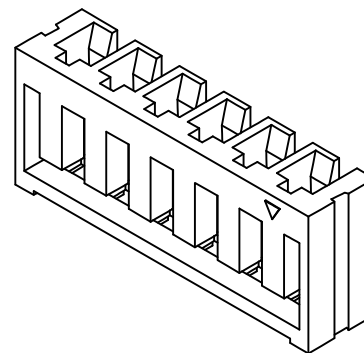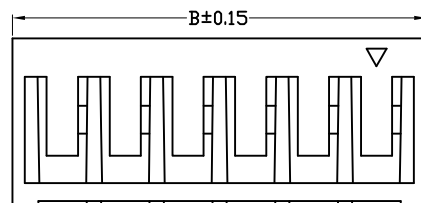

标示“ ”的尺寸须重点管控

PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B
1*02P	2.50	6.50	1*10P	22.50	26.50
1*03P	5.00	9.00	1*11P	25.00	29.00
1*04P	7.50	11.50	1*12P	27.50	31.50
1*05P	10.00	15.00	1*13P	30.00	34.00
1*06P	12.50	16.50	1*14P	32.50	36.50
1*07P	15.00	19.00	1*15P	35.00	39.00
1*08P	17.50	21.50	1*16P	37.50	41.50
1*09P	20.00	24.00			



TOLERANCE		Zen High Precision Industrial Ltd			
X.X	±0.25	TITLE 2.50mm (.098") Pitch Housing			
X.XX	±0.15				
X.XXX	±0.10	VIEW 			
ANGULAR	--				
APPROVALS		SCALE	PART NO.	REV.	
DRAWN	TOMA	1:1	ZH-1000AR-HXX	A0	
CHECKED		UNIT	DWG NO.	SHEET	
APPROVED		mm	H15-160401	1 OF 1	

RI E363554

RoHS2.0 compliant

REV	DATE	MODIFY
A1	2016/3/17	TOMA
A2	2016/6/29	TOMA


Features:

- * Used in ZH-1000AR-H Series Housing
- * Accepts AWG #22~28 Wire Range
- * Insulation O.D.= 1.70mm(max)
- * Material : Brass or Phosphor Bronze
- * Finish : Gold-Plated or Tin-Plated
- * Qty/Reel : 10,000 PCS
- * Thickness: 0.2mm

Ordering information:

ZH- 1000AR-T X X X
I 2 3 4

- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
□BRASS
P:Phosphor bronze

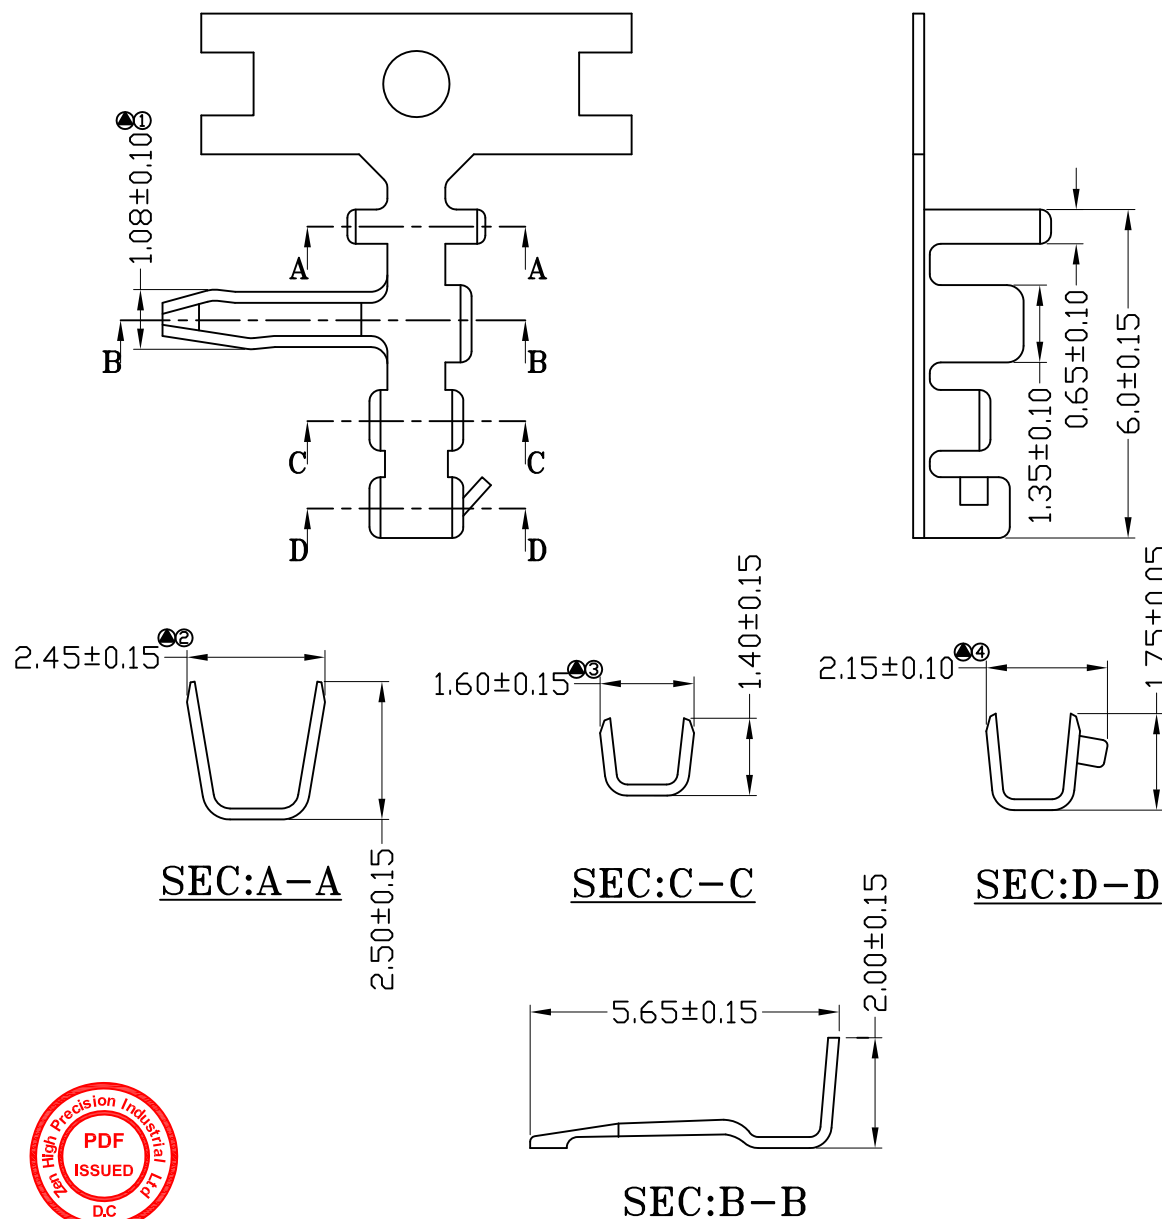

标示 “” 的尺寸须重点管控

TOLERANCE		Zen High Precision Industrial Ltd		
X.	--			
X.X	±0.25			
X.XX	±0.15			
X.XXX	±0.10			
ANGULAR	--			
APPROVALS		TITLE		
DRAWN	TOMA	2.50mm (.098") Pitch Crimp Terminal		
CHECKED	30-JAN-2016	VIEW	SCALE	PART NO.
APPROVED			F	ZH-1000AR-TXXX
		UNIT	SIZE	DWG NO.
		mm	A4	T15-160701
				REV.
				A2
				SHEET
				1 OF 1

