

RL[®] E363554

RoHS2.0 compliant

REV	DATE	MODIFY

Features:

- * Available in 09 Circuits
- * Material: NY66 UL94 V-0
- * Accepts ZH-1500-TF Crimp Terminal
- * Color: Black







Ordering information:

ZH-1500-H N 09 Q - A
1 2 3 4 5

1. H: Housing/胶壳
2. N: With Nose/带鼻
3. No.of Circuits 09/电路数 9路
4. Q: NY66 UL94 V-0
5. A: Black/黑色

- 要求: 1. 穿线孔、视窗毛边<0.15mm。
2. 其他部位毛边<0.30mm

标示“”的尺寸需重点管控

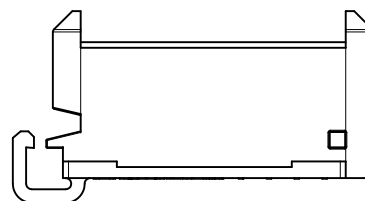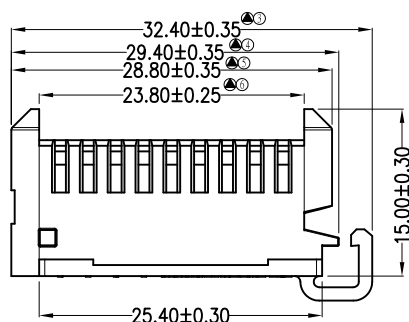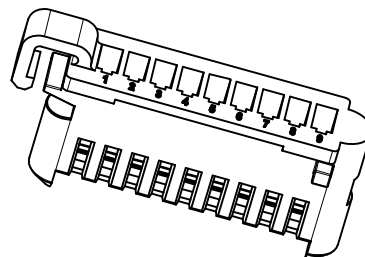

TOLERANCE		 Zen High Precision Industrial Ltd			
X.	--	TITLE 2.50mm(.098")Pitch Housing			
X.X	±0.25				
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR	--				
APPROVALS		VIEW	SCALE	PART NO.	REV.
DRAWN			1:1	ZH-1500-HN09Q-A	AO
CHECKED		UNIT	SIZE	DWG NO.	SHEET
APPROVED		MM	A4	HB2-220407-01	1 OF 1

RoHS2.0 compliant

REV	DATE	MODIFY


Features:

- * Used in ZH-1500-H crimp Housing
- * Accepts AWG #22~28 Wire Range
- * Insulation O.D.=1.60mm Max
- * Material : Brass/Phosphor bronze
- * Qty/Reel: 7,000 PCS
- * Thickness: 0.20mm


Ordering information:

ZH-1500-TF X X X
1 2 3 4


- 1 TF=Female Terminal/母端子
2 2 Plated/镀层
T=Tin/镀锡 G=Gold/镀金
3 Plated Method/电镀方式
A: Plated before stamping/先镀后冲
B: Stamping before plated/先冲后镀
4 Material/材质
□: Brass/黄铜
P: Phosphor Bronze/磷铜

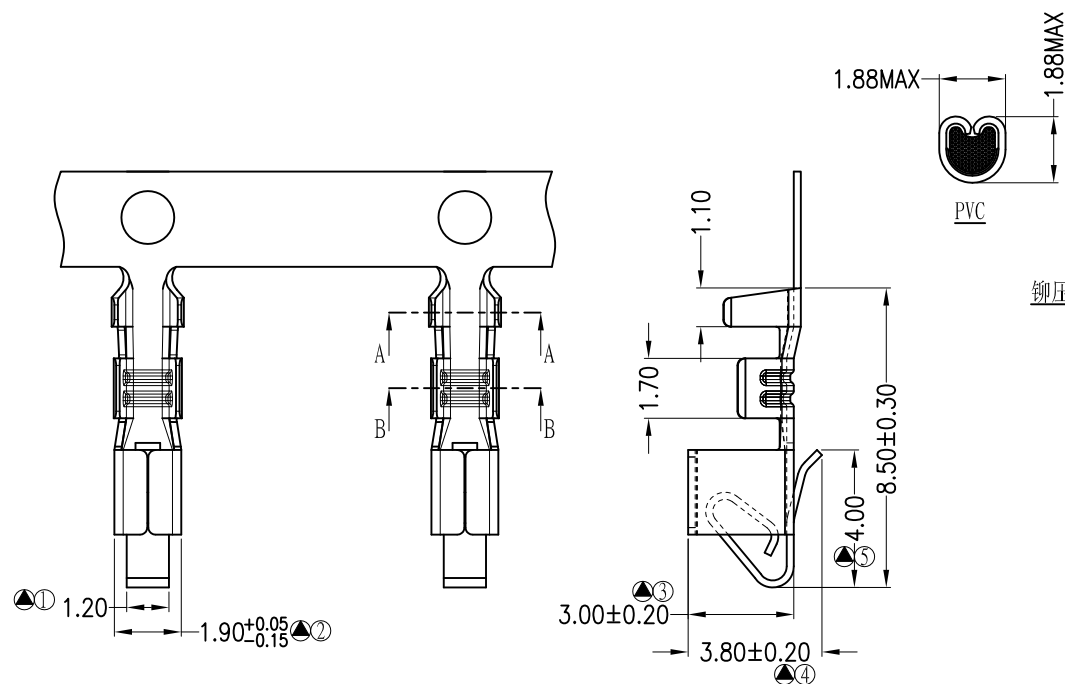


铆压尺寸参考



SEC:A-A



SEC:B-B



标示“”的尺寸需重点管控



TOLERANCE		 Zen High Precision Industrial Ltd		
X.	--			
X.X	±0.25			
X.XX	±0.15			
X.XXX	±0.05			
ANGULAR	--			
APPROVALS		TITLE		
DRAWN	19-Apr-2022	2.50mm (.098") Pitch Terminal		
CHECKED		VIEW	SCALE	PART NO.
APPROVED		UNIT	SIZE	DWG NO.
		MM	A4	TB1-220408-01
				REV.
				A0
				SHEET
				1 OF 1