
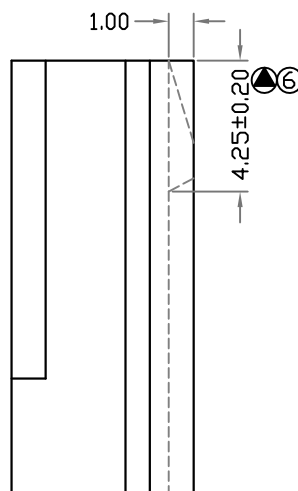
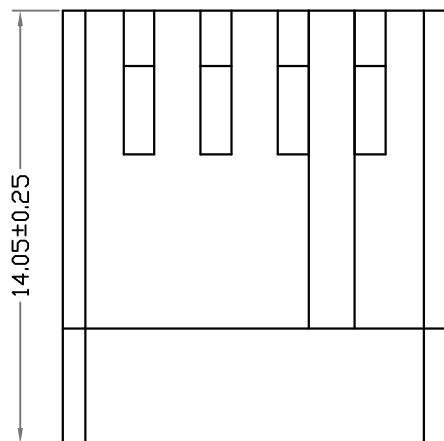


RL® E363554

RoHS2.0 compliant

REV	MODIFY	DATE

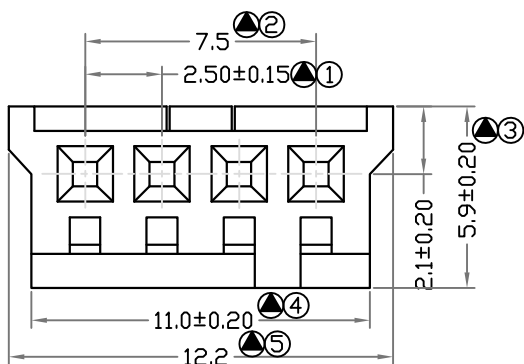

Features:

- * Available in 04 Circuits
- * Material: Nylon 66 UL94V-0
- * Accepts ZH-1700-T Crimp Terminal
- * Mates with ZH-1700-W04S or ZH-1700-W04R Series Wafer
- * Color: Nature(White)

Ordering information:

ZH-1700-H 04 M - X X
I 2 3 4 5

- 1 H=Housing
- 2 No. of Circuits 04P
- 3 M:Male
- 4 □Nature
U: 莹光
UV: 反莹光
- 5 Color:

□Nature	A:Black	B:Brown	C:Red
D:Orange	E:Yellow	F:Green	G:Blue
H:Purple	I:Gray	J:White	K:Pink

标示“”的尺寸需重点管控



TOLERANCE		Zen High Precision Industrial Ltd			
X.	--	TITLE 2.50mm (.098") Pitch Housing			
X.X	±0.25				
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR	--				
APPROVALS		VIEW	SCALE	PART NO.	REV.
DRAWN	TOMA		1:1	ZH-1700-H04M-XX	A0
CHECKED	28-JUL-2018				
APPROVED		UNIT	SIZE	DWG NO.	SHEET
		MM	A4	H26-180704	1 OF 1

RoHS2.0 compliant

REV	DATE	MODIFY

Features:

- * Used in ZH-1700-HXXM Housing
- * Accepts AWG #18~24 Wire Range
- * Insulation O.D.= 2.1mm(max)
- * Material : Brass or Phosphor Bronze
- * Finished : Gold-Plated or Tin-Plated
- * Qty/Reel : 8,000 PCS
- * Thickness: 0.2mm

Ordering information:

ZH-1700-T F X X X
1 2 3 4 5

1 T=Terminal

2 F:Female

3 Plated:

T=Tin G=Gold

4 Plated Method:

A: Plated before stamping



B: Stamping before plated

5 Material:


□BRASS

P:Phosphor bronze


标示“”的尺寸需重点管控

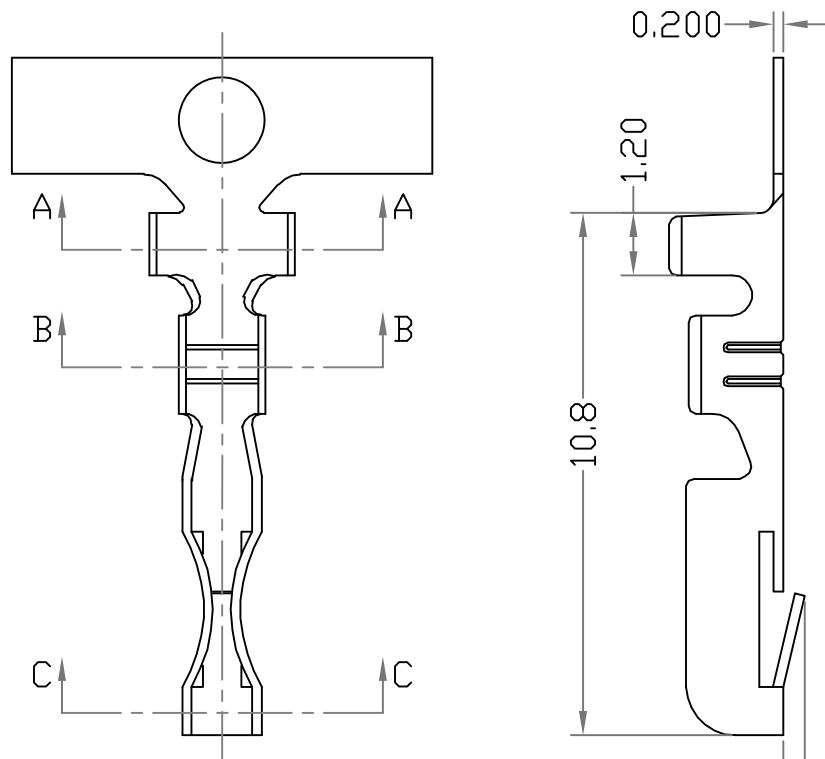

A-A



B-B



C-C

TOLERANCE	
X.	--
X.X	±0.25
X.XX	±0.20
X.XXX	±0.10
ANGULAR	--
APPROVALS	
DRAWN	TOMA
CHECKED	28-JUL-2018
APPROVED	



Zen High Precision Industrial Ltd

TITLE

2.50mm (.098") Pitch Crimp Terminal

VIEW	SCALE	PART NO.	REV.
	F	ZH-1700-TFXXX	A0
UNIT	SIZE	DWG NO.	SHEET
MM	A4	T7-180705	1 OF 1

