

RoHS2.0 compliant

REV	DATE	MODIFY



Features:

- * Used in ZH-5700-H crimp housing
- * Accepts AWG #16+16 16+18 18+18 Wire Range
- * Insulation O.D.=1.3~3.1mm
- * Material : Brass/Phosphor bronze
- * Finished: Tin-Plated or Gold-Plated
- * Qty/Reel: 3500 PCS
- * Thickness: 0.20mm


Ordering information:

ZH-5700-T X X X LE T-2
1 2 3 4 5 6 7


- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
□: BRASS
P: Phosphor bronze
- 5 LE: 特高脚
- 6 T: 新型端
- 7 2: 2代

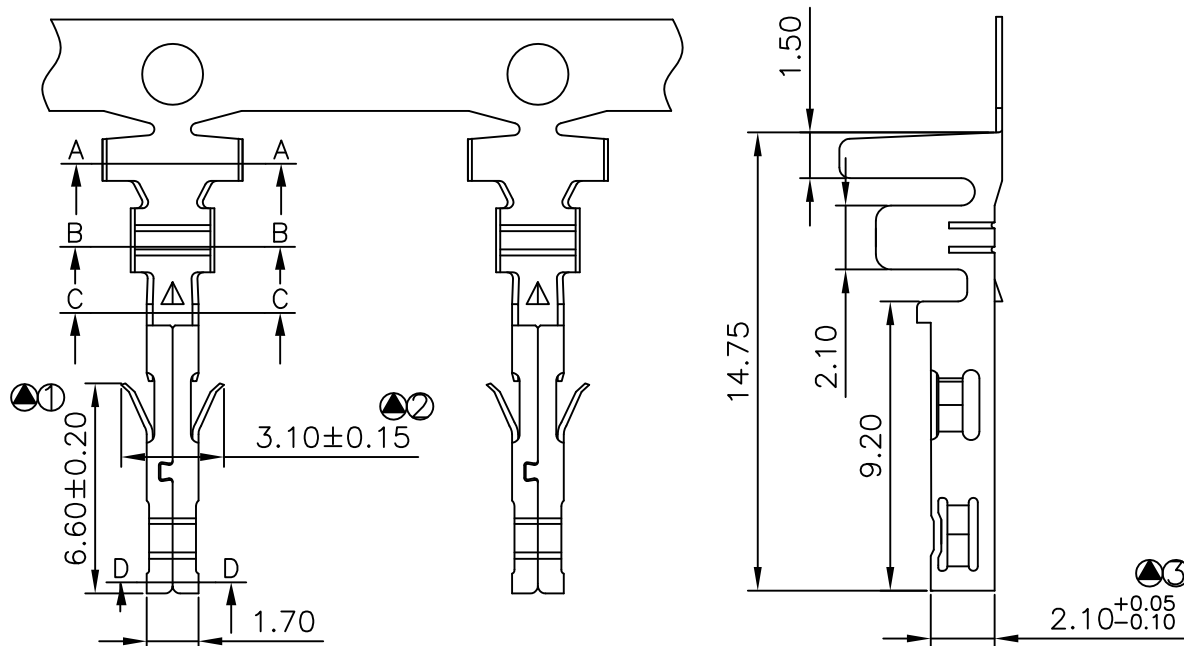


A-A



B-B



C-C

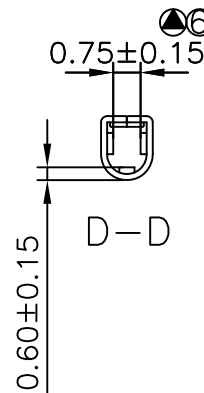

D-D

标示“”的尺寸需重点管控

TOLERANCE		ZH Connector Zen HighPrecision Industrial Ltd			
X.	--	TITLE 4.20mm (.165") Pitch High Current Terminal			
X.X	±0.25				
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR	--				
APPROVALS					
DRAWN	TOMA 13-JUL-2015	VIEW 	SCALE 1:1	PART NO. ZH-5700-TXXXLET-2	REV. A0
CHECKED		UNIT MM	SIZE A4	DWG NO. ETB1-150738	SHEET 1 OF 1
APPROVED					

