

RoHS2.0 compliant

REV	DATE	MODIFY

Features:





- * Used in ZH-5700-H crimp housing
- * Accepts AWG #18+18~18 Wire Range
- * Insulation O.D.=1.3~3.1mm
- * Material : Brass or Phosphor bronze
- * Finished: Tin-Plated
- * Qty/Reel: 5000 PCS
- * Thickness: 0.20mm

Ordering information:

ZH-5700-T X X X L T-3 Z
1 2 3 4 5 6 7

- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
□ Brass
P: Phosphor bronze
- 5 L: High Heel
- 6 T-3: New Tyep Termiral 3
- 7 Z: LOGO"ZH"

标示“●”的尺寸需重点管控

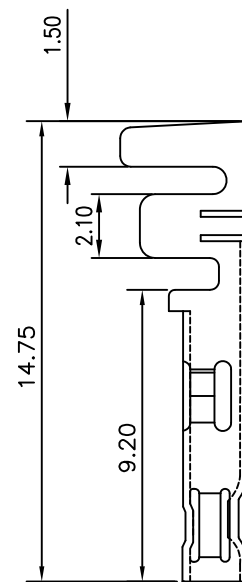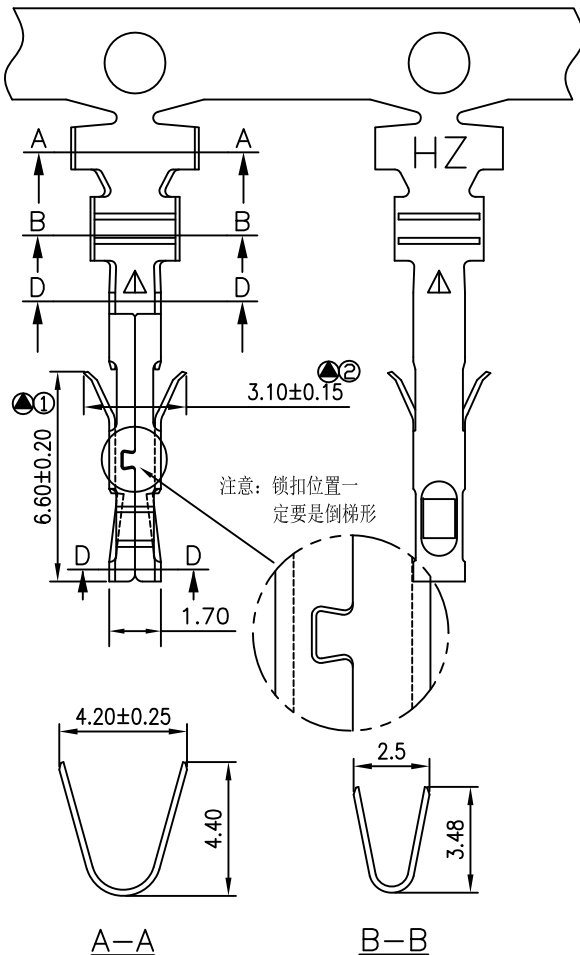

TOLERANCE		Zen HighPrecision Industrial Ltd		
X.	--	TITLE 4.20mm (.165") Pitch High Current Terminal		
X.X	±0.25			
X.XX	±0.15			
X.XXX	±0.05			
ANGULAR	--			
APPROVALS		VIEW	SCALE	PART NO.
DRAWN	TOMA 14-FEB-2022		1:1	ZH-5700-TXXXLT-3Z
CHECKED		UNIT	SIZE	DWG NO.
APPROVED		MM	A4	TB1-220201
REV.				SHEET
A0				1 OF 1

