
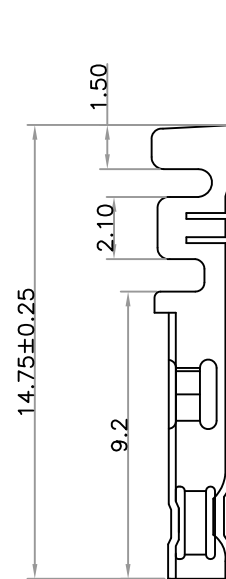


RoHS2.0 compliant

REV	DATE	MODIFY

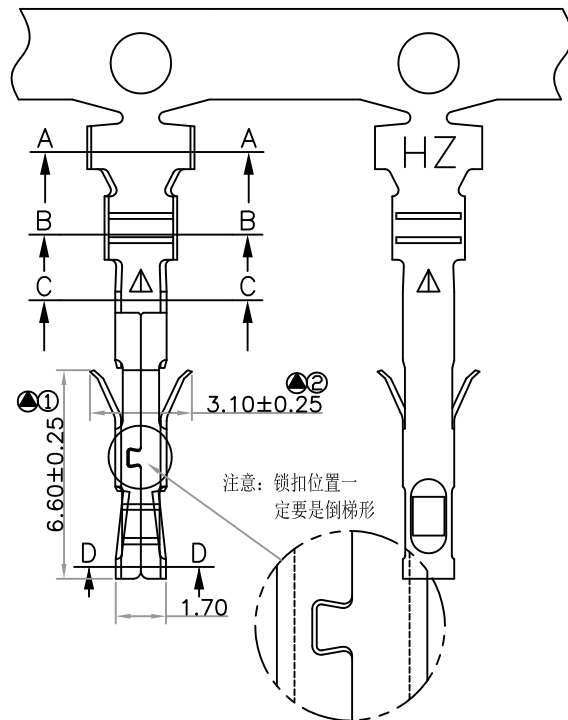

Features:

- * Used in ZH-5700-H crimp housing
- * Accepts AWG #18~24 Wire Range
- * Insulation O.D.=1.3~3.1mm
- * Material :Brass or Phosphor bronze
- * Finished: Tin-Plated or Gold-Plated
- * Qty/Reel: 10,000 PCS
- * Thickness: 0.20mm


Ordering information:

ZH-5700-T X X X S T-3Z
1 2 3 4 5 6


- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
□ Brass
P: Phosphor bronze
- 5 S: Low Heel
- 6 T-3: New Tyep Termiral 3 LOGO"ZH"

"△" A1 version change


标示 "●" 的尺寸需重点管控




A-A



B-B



C-C



D-D



TOLERANCE		Zen High Precision Industrial Ltd			
X.	--	TITLE 4.20mm (.165") Pitch High Terminal			
X.X	±0.25				
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR	--				
APPROVALS		VIEW	SCALE	PART NO.	REV.
DRAWN	TOMA 14-FEB-2022		1:1	ZH-5700-TXXXST-3Z	AO
CHECKED		UNIT	SIZE	DWG NO.	SHEET
APPROVED		MM	A4	TB1-220202	1 OF 1