

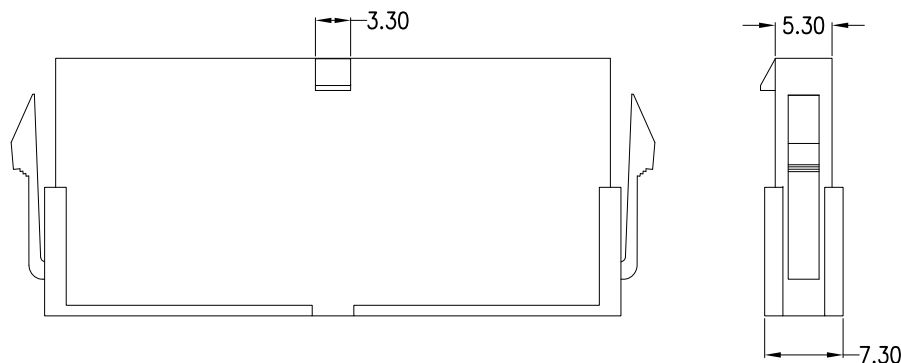




RU® E363554

RoHS2.0 compliant

Circuits	Dimension mm	
	A	B
2	4.2	11.7
3	8.4	15.9
4	12.6	20.1
5	16.8	24.3
6	21.0	28.5
7	25.2	32.7
8	29.4	36.9
9	33.6	41.1
10	37.8	45.3
11	42.0	49.5
12	46.2	53.7



SEC:A-A

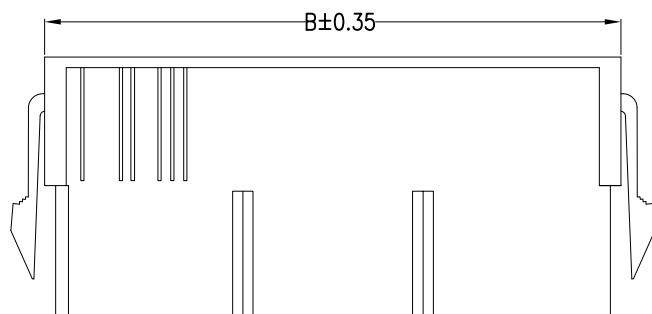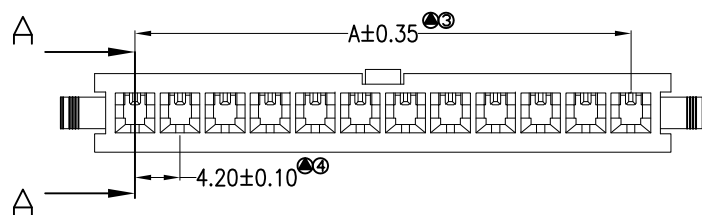

Features:

- * Available In 02 Through 12 Circuits
- * Material: Nylon 66 UL94V-2
- * Accepts ZH-5800-T Crimp Terminal
- * Mates with ZH-5700-HXXS series Housing

Ordering information:

ZH-5800-H XX G S X-X
1 2 3 4 5 6

- 1 H:Housing
- 2 No. of Circuits 02~12
- 3 G General/常规
- 4 S:Single Row/单排
- 5 □Nylon66 UL94V-2
- 6 Color:

□Nature	A:Black	B:Brown	C:Red
D:Orange	E:Yellow	F:Green	G:Blue
H:Purple	I:Gray	J:White	K:Pink

标示“ ”的尺寸须重点管控

TOLERANCE		Zen High Precision Industrial Ltd.	
X.	--		
X.X	±0.25	TITLE	
X.XX	±0.20		
X.XXX	±0.05		
ANGULAR	--		
APPROVALS		4.2mm (.165") Pitch Housing	
DRAWN	TOMA 13-AUG-2020	VIEW	SCALE
CHECKED			F
APPROVED		UNIT	SIZE
		mm	A4
		PART NO.	REV.
		ZH-5800-HXXGSX-X	A0
		DWG NO.	SHEET
		H17-200803	1 OF 1



RI® E363554

RoHS2.0 compliant

REV	DATE	MODIFY

Features:


- * Available In 03 Through 05 Circuits
- * Material: Nylon 66 UL94V-2
- * Accepts ZH-5800-T Crimp Terminal
- * Mates with ZH-5700-HXXS series Housing

Ordering information:


ZH-5800-H XX S F X - X
1 2 3 4 5 6

- 1 H:Housing
- 2 No. of Circuits 03~05
- 3 S:Single Row
- 4 F:Without Ears
- 5 ☐Nylon66 94V-2
- 6 Color:

☐ Nature	A:Black	B:Brown	C:Red
D:Orange	E:Yellow	F:Green	G:Blue
H:Purple	I:Gray	J:White	K:Pink

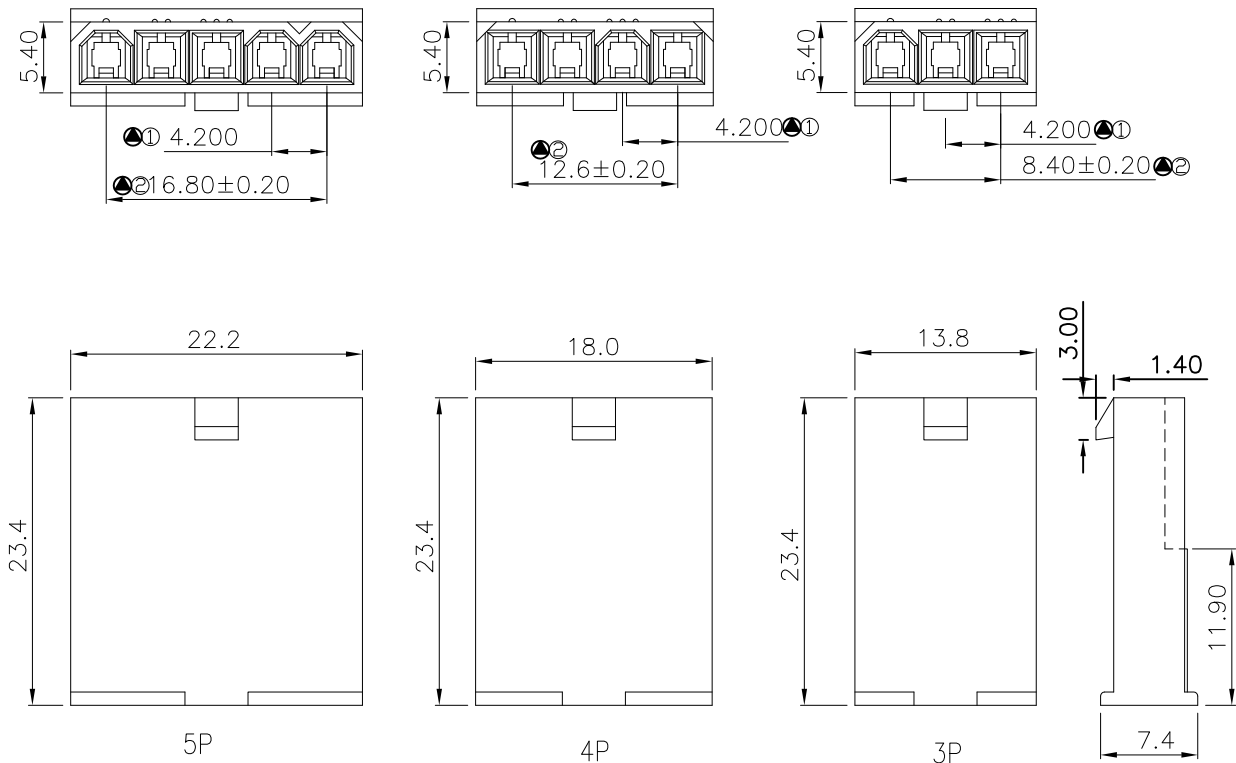

标示“”的尺寸须重点管控

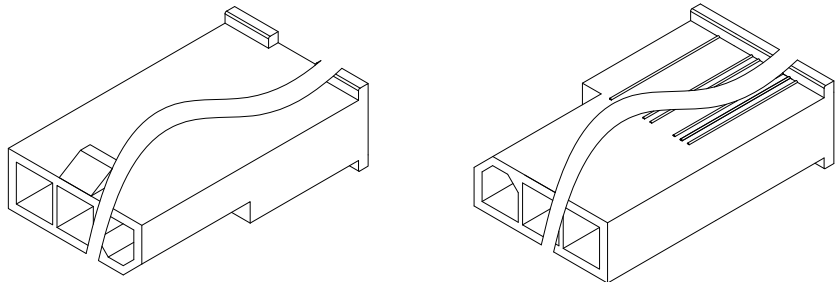

TOLERANCE		Zen High Precision Industrial Ltd.	
X.	--		
X.X	±0.25	TITLE 4.2mm (.165") Pitch Housing	
X.XX	±0.15		
X.XXX	±0.05		
ANGULAR	--	APPROVALS	
DRAWN	TOMA 25-DEC-2012	VIEW 	SCALE F
CHECKED		UNIT mm	SIZE A4
APPROVED		PART NO. ZH-5800-HXXSFX-X	REV. A0
		DWG NO. HB2-121204	SHEET 1 OF 1