
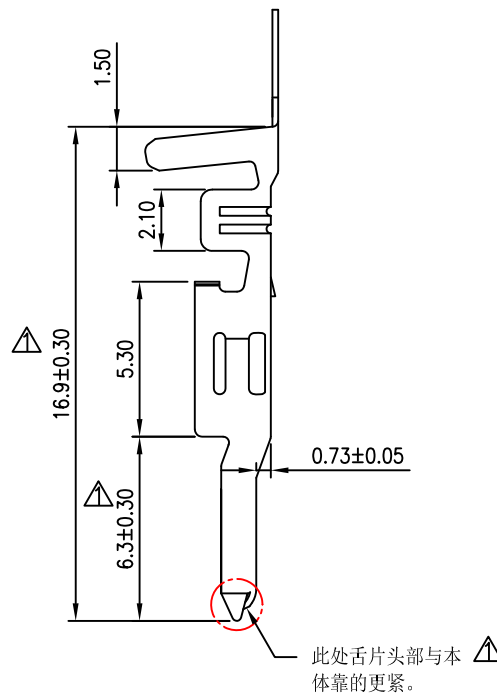


RoHS2.0 compliant

REV	DATE	MODIFY
A1	2020/12/25	TOMA

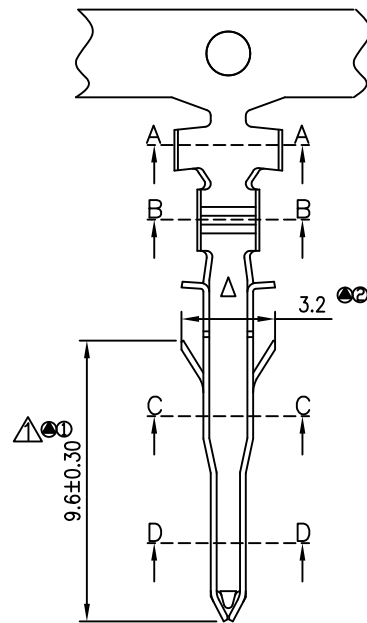

Features:

- * Used in ZH-5800-HXX Series Housing
- * Accepts AWG #18~22 Wire Range
- * Insulation O.D.= 3.1 mm(max)
- * Material : Brass or Phosphor Bronze
- * Finish : Tin-Plated or Gold-Plated
- * Qty/Reel : 4,000 PCS
- * Thickness: 0.2mm





Ordering information:

ZH-5800-T X X X M
1 2 3 4 5

- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
□BRASS
P:Phosphor bronze
- 5 M:Middle foot 中脚

"△" First change point

标示 "⊙" 的尺寸须重点管控



TOLERANCE		Zen High Precision Industrial Ltd		
X.	--	TITLE 4.20mm (.165") Pitch Crimp Terminal		
X.X	±0.25			
X.XX	±0.15			
X.XXX	±0.05			
ANGULAR	--			
APPROVALS		VIEW	SCALE	PART NO.
DRAWN	TOMA		1:1	ZH-5800-TXXXXM
CHECKED	22-AUG-2013			
APPROVED		UNIT	SIZE	DWG NO.
		MM	A4	TB1-130835
				REV.
				A1
				SHEET
				1 OF 1