
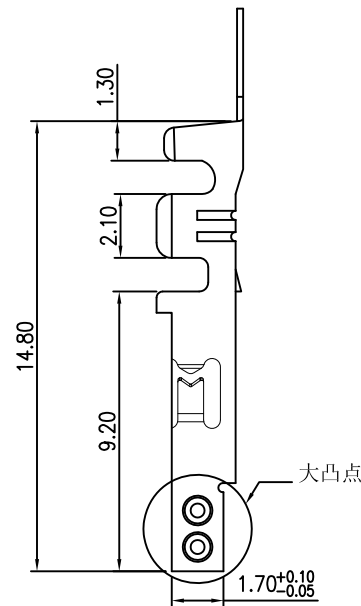


RoHS2.0 compliant

REV	DATE	MODIFY
A1	2015/12/11	TOMA

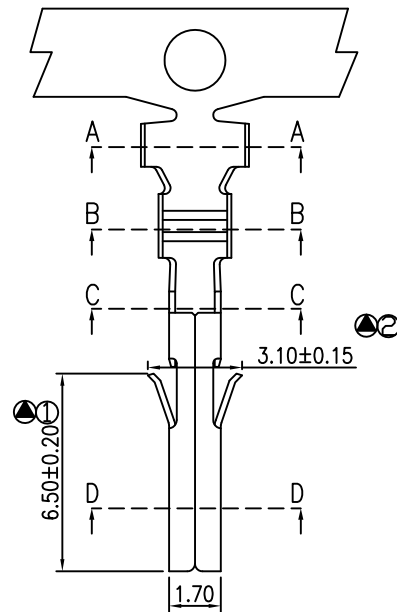


Features:

- * Used in ZH-5700-H crimp housing
- * Accepts AWG #18~22 Wire Range
- * Insulation O.D.=2.1mm MAX
- * Material : High conductivity copper
- * Finished: Tin-Plated or Gold-Plated
- * Qty/Reel: 10,000 PCS
- * Thickness: 0.20mm


Ordering information:

ZH-5700-TXXRS
1 2 3 4 5


- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
R:High conductivity copper
- 5 S: Low heel




A-A



B-B



C-C



D-D

标示“”的尺寸需重点管控

TOLERANCE		 Zen High Precision Industrial Ltd		
X.	--			
X.X	±0.25			
X.XX	±0.15			
X.XXX	±0.05			
ANGULAR	--			
APPROVALS		TITLE		
DRAWN	LIU JUAN	4.20mm (.165") Pitch Terminal		
CHECKED	02-JUN-2015			
APPROVED		VIEW	SCALE	PART NO.
			1:1	ZH-5700-TXXRS
		UNIT	SIZE	DWG NO.
		MM	A4	ETB1-150601
				REV.
				A1
				SHEET
				1 OF 1

