


RoHS2.0 compliant

REV	DATE	MODIFY
A1	2020/10/29	TOMA

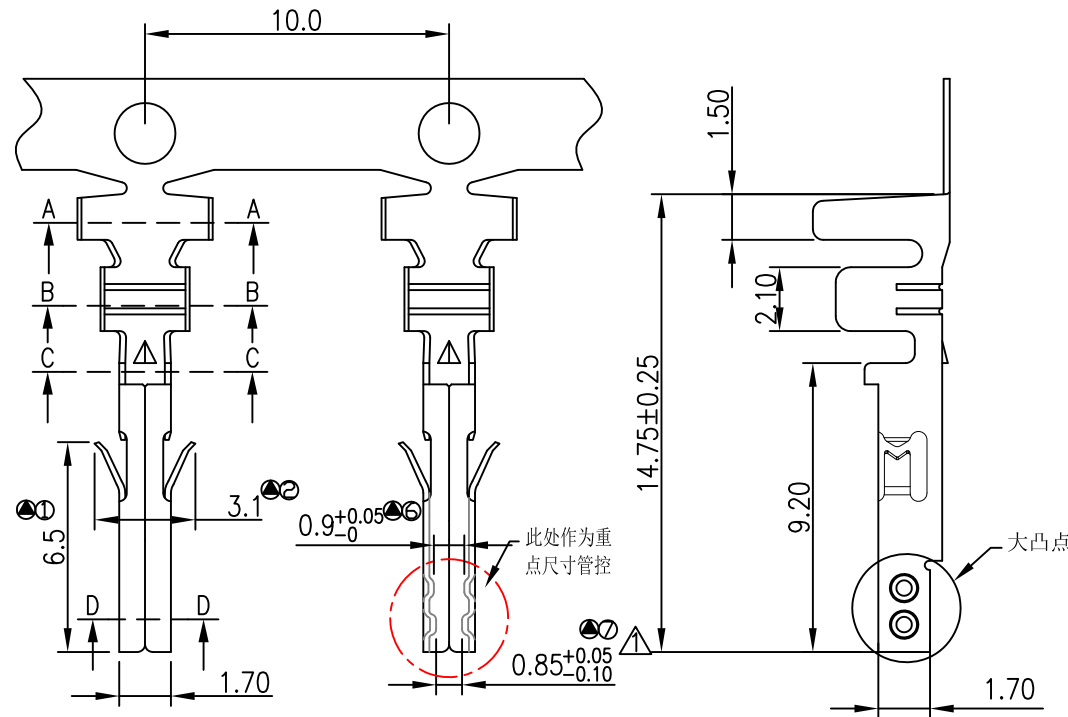

Features:


- * Used in ZH-5700-H crimp housing
- * Accepts AWG #16&18~20 Wire Range
- * Insulation O.D.=1.3~3.1mm
- * Material : High conductivity copper
- * Finished: Tin-Plated or Gold-Plated
- * Qty/Reel: 5,000 PCS
- * Thickness: 0.20mm

Ordering information:

ZH-5700-T X X R L - 1
1 2 3 4 5 6

- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
R:High conductivity copper
- 5 L:High Heel
- 6 新模

标示“”的尺寸需重点管控

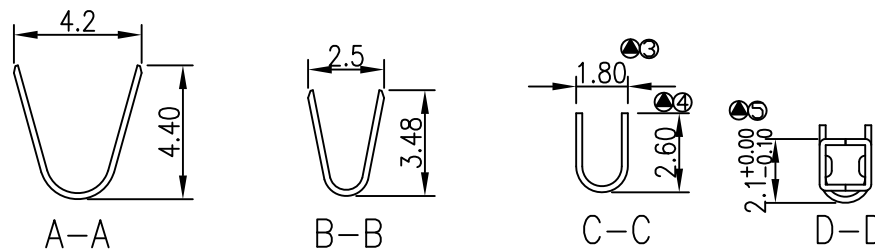

TOLERANCE		ZH Connector Zen High Precision Industrial Ltd			
X.	--	TITLE 4.20mm (.165”) Pitch Terminal			
X.X	±0.25				
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR	--				
APPROVALS					
DRAWN	TOMA 17—OCT—2014	VIEW 	SCALE 1:1	PART NO. ZH-5700-TXXRL—1	REV. A1
CHECKED		UNIT MM	SIZE A4	DWG NO. ETB1—141101	SHEET 1 OF 1
APPROVED					