

RoHS2.0 compliant

REV	DATE	MODIFY







Features:

- * Used in ZH-5700-H crimp housing
- * Accepts AWG #18~18 Wire Range
- * Insulation O.D.=1.3~3.1mm
- * Material : High conductivity copper
- * Finished: Tin-Plated
- * Qty/Reel: 5000 PCS
- * Thickness: 0.20mm

Ordering information:

ZH-5700-T X X R L T-3 Z
1 2 3 4 5 6 7

- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
R: High conductivity copper
- 5 L: High Heel
- 6 T-3: New Tyep Termiral 3
- 7 Z: LOGO"ZH"

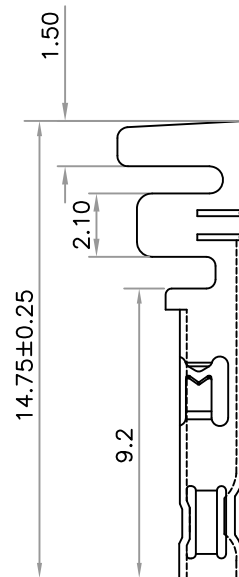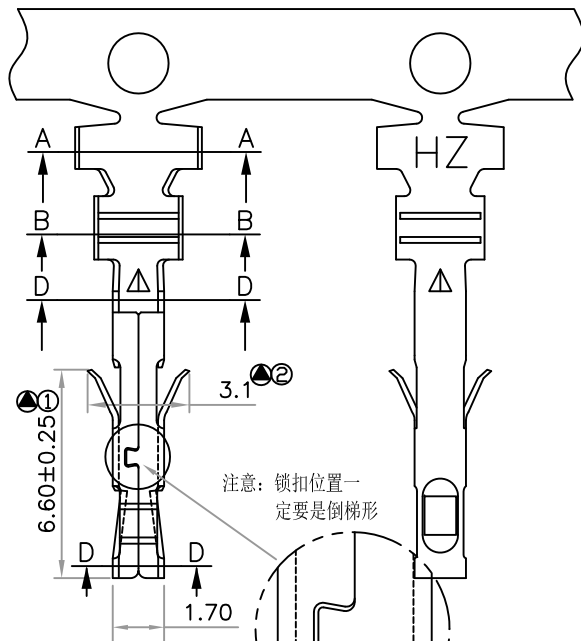

标示“●”的尺寸需重点管控



TOLERANCE		Zen HighPrecision Industrial Ltd			
X.	--	TITLE 4.20mm (.165") Pitch High Current Terminal			
X.X	±0.25				
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR	--				
APPROVALS		DRAWN			
DRAWN		VIEW		SCALE	PART NO.
CHECKED		UNIT		SIZE	DWG NO.
APPROVED		MM		A4	TB1-220203
					REV. A0
					SHEET 1 OF 1