
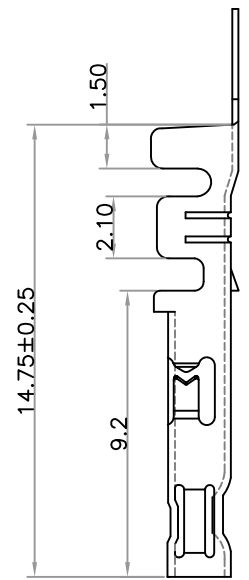


RoHS2.0 compliant

REV	DATE	MODIFY

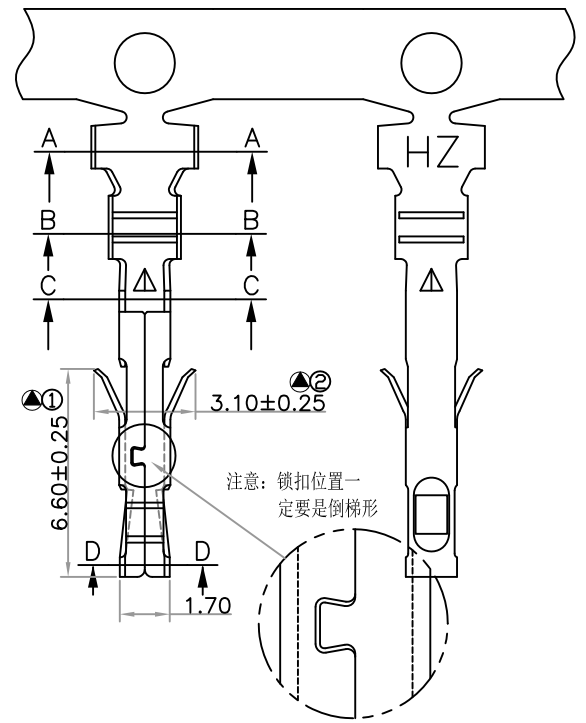





Features:

- * Used in ZH-5700-H crimp housing
- * Accepts AWG #18~24 Wire Range
- * Insulation O.D.=1.3~3.1mm
- * Material :High conductivity copper
- * Finished: Tin-Plated or Gold-Plated
- * Qty/Reel: 10,000 PCS
- * Thickness: 0.20mm

Ordering information:


ZH-5700-T X X R S T-3Z
1 2 3 4 5 6

- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
R: High conductivity copper
- 5 S: Low Heel
- 6 T-3Z: New Tyep Termiral 3 LOGO"ZH"



标示“▲”的尺寸需重点管控



TOLERANCE		 Zen High Precision Industrial Ltd		
X.	--			
X.X	±0.25	TITLE 4.20mm (.165") Pitch High Terminal		
X.XX	±0.15			
X.XXX	±0.05			
ANGULAR	--			
APPROVALS				
DRAWN		VIEW	SCALE	PART NO.
CHECKED	14-FEB-2022		1:1	ZH-5700-TXXRST-3Z
APPROVED		UNIT	SIZE	DWG NO.
		MM	A4	TB1-220204
				REV.
				A0
				SHEET
				1 OF 1