
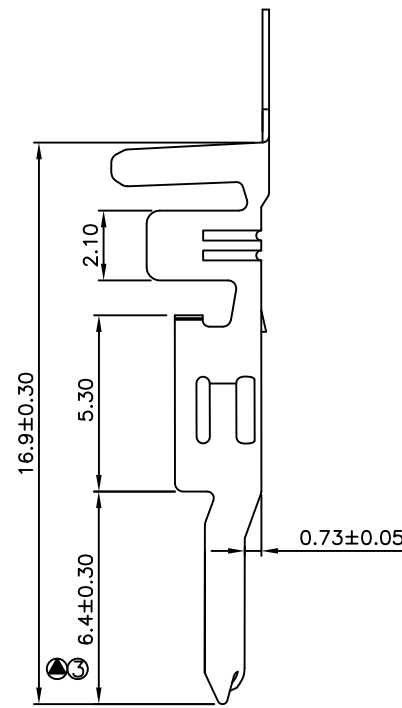


RoHS2.0 compliant

REV	DATE	MODIFY

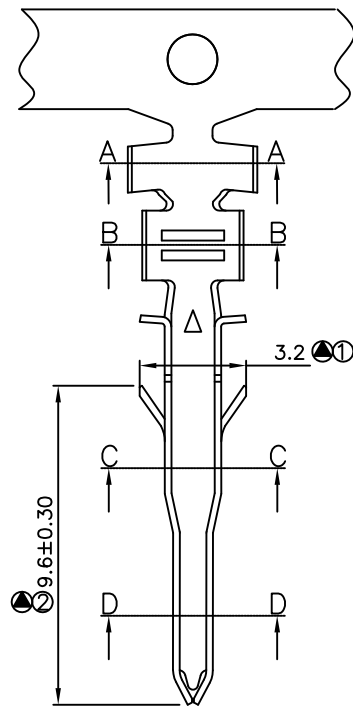





Features:

- * Used in ZH-5800-HXX Series Housing
- * Accepts AWG #16+18~18 Wire Range
- * Insulation O.D.= 3.1 mm(max)
- * Material : High conductivity copper
- * Finish : Tin-Plated or Gold-Plated
- * Qty/Reel : 4,000 PCS
- * Thickness: 0.2mm

Ordering information:

ZH-5800-T X X R L
1 2 3 4 5

- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
R:High conductivity copper
- 5 L: High foot 高脚



标示“”的尺寸须重点管控

TOLERANCE		Zen High Precision Industrial Ltd			
X.	--	TITLE 4.20mm (.165") Pitch Crimp Terminal			
X.X	±0.25				
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR	--				
APPROVALS		VIEW	SCALE	PART NO.	REV.
DRAWN	TOMA		1:1	ZH-5800-TXXRL	A0
CHECKED	30-AUG-2017				
APPROVED		UNIT	SIZE	DWG NO.	SHEET
		MM	A4	TB1-170812	1 OF 1

