

RoHS2.0 compliant

REV	DATE	MODIFY
A1	2020/12/25	TOMA


Features:

- * Used in ZH-5800-HXX Series Housing
- * Accepts AWG #18~22 Wire Range
- * Insulation O.D.= 3.1 mm(max)
- * Material : High conductivity copper
- * Finish : Tin-Plated or Gold-Plated
- * Qty/Reel : 4,000 PCS
- * Thickness: 0.2mm

Ordering information:

ZH-5800-T X X R M
1 2 3 4 5


- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
R:High conductivity copper
- 5 M:Middle foot 中脚

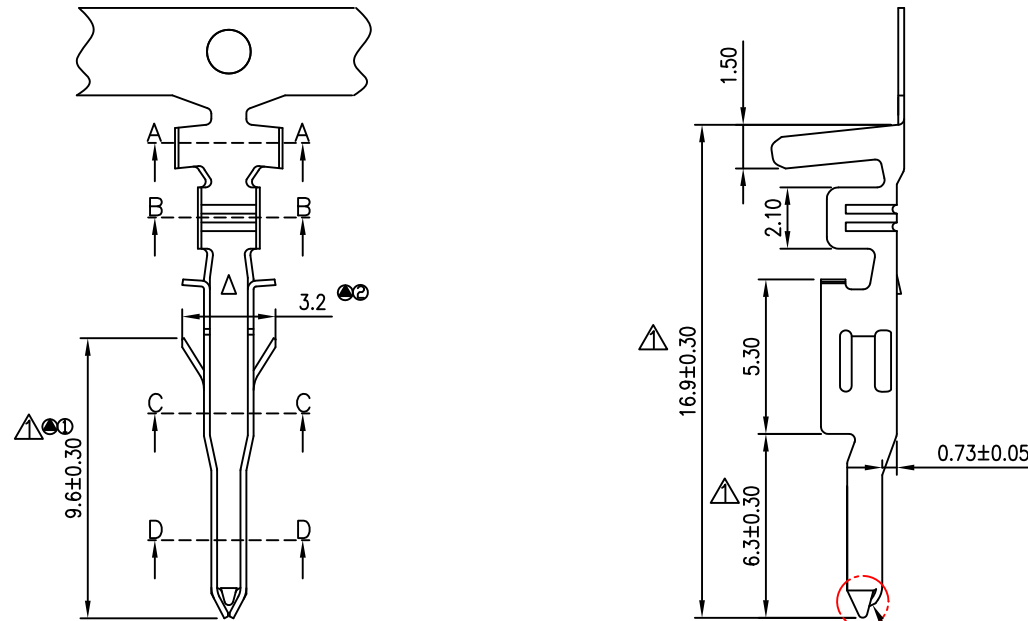

此处舌片头部与本
体靠的更紧。 △

"△" First change point

标示 "△" 的尺寸须重点管控

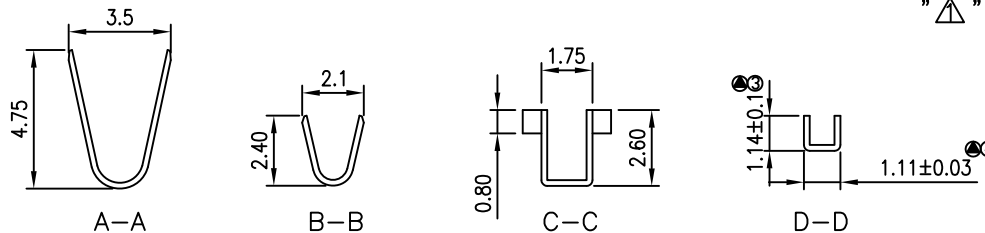

TOLERANCE		ZH Connector Zen High Precision Industrial Ltd		
X.	--	TITLE 4.20mm (.165") Pitch Crimp Terminal		
X.X	±0.25			
X.XX	±0.15			
X.XXX	±0.05			
ANGULAR	--			
APPROVALS		VIEW	SCALE	PART NO.
DRAWN	TOMA		1:1	ZH-5800-TXXRM
CHECKED	22-AUG-2013			
APPROVED				
		UNIT	SIZE	DWG NO.
		MM	A4	TB1-130835
				REV.
				A1
				SHEET
				1 OF 1