


RoHS2.0 compliant

REV	DATE	MODIFY

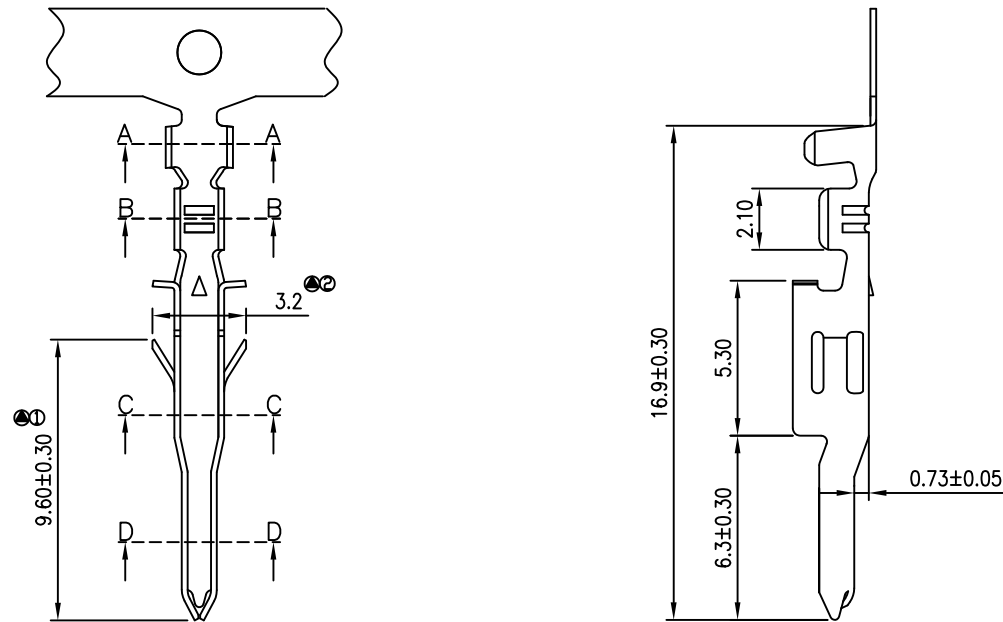


Features:

- * Used in ZH-5800-HXX Series Housing
- * Accepts AWG #20~24 Wire Range
- * Insulation O.D.=1.85 mm(max)
- * Material : High conductivity copper
- * Finish : Tin-Plated or Gold-Plated
- * Qty/Reel : 7,000 PCS
- * Thickness: 0.2mm

Ordering information:

ZH-5800-T X X R S
1 2 3 4 5

- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
R:High conductivity copper
- 5 S: 低脚

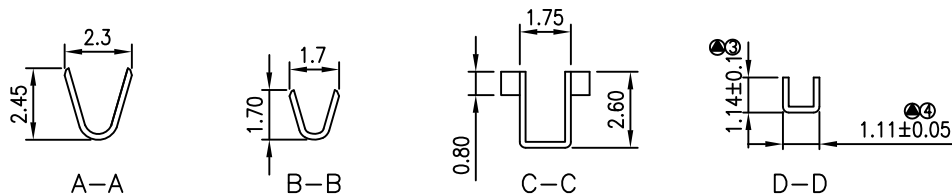

标示“”的尺寸须重点管控

TOLERANCE		Zen High Precision Industrial Ltd			
X.	--	TITLE 4.20mm (.165") Pitch Crimp Terminal			
X.X	± 0.25				
X.XX	± 0.15				
X.XXX	± 0.05				
ANGULAR	--				
APPROVALS					
DRAWN	TOMA 22-AUG-2013	VIEW 	SCALE 1:1	PART NO. ZH-5800-TXXRS	REV. A0
CHECKED		UNIT MM	SIZE A4	DWG NO. TB1-130851	SHEET 1 OF 1
APPROVED					

