


RoHS2.0 compliant

REV	DATE	MODIFY
A1	2019/5/23	TOMA

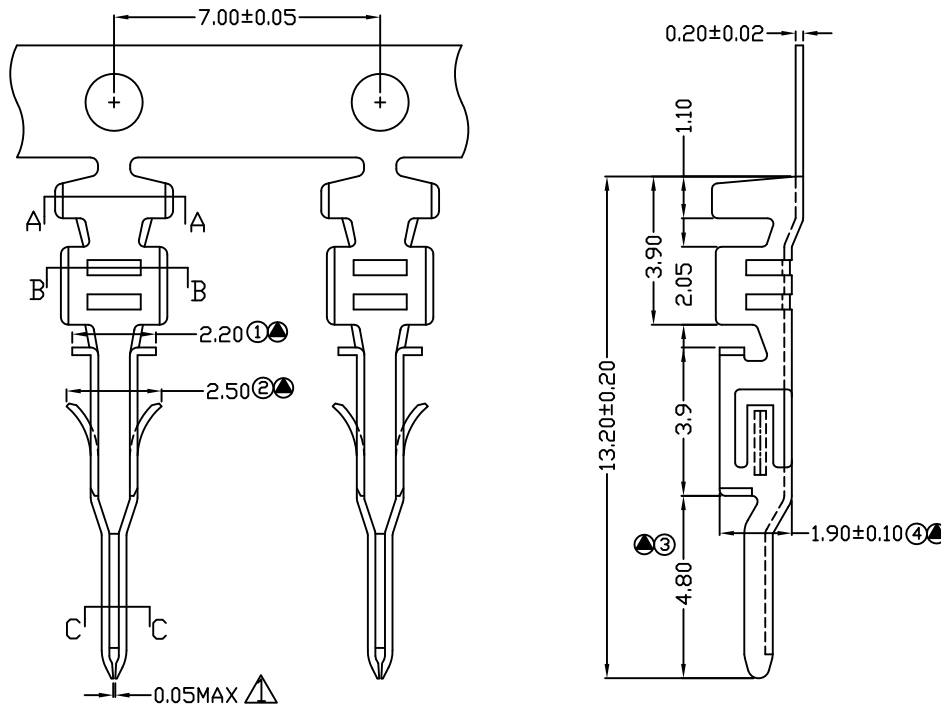

Features:

- * Used in ZH-5850-H crimp housing
- * Accepts AWG #16~20 Wire Range
- * Insulation O.D.= 2.40mm (max)
- * Material : High conductivity copper
- * Finished: Tin-Plated or Gold-Plated
- * Thickness: 0.20mm

Ordering information:

ZH-5850-T X X R L
1 2 3 4 5

- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
R:High conductivity copper
- 5 L:High Heel

标示“”的尺寸须重点管控

TOLERANCE		Zen High Precision Industrial Ltd		
X.	--	TITLE 3.00mm (.118") Pitch Crimp Terminal		
X.X	± 0.25			
X.XX	± 0.15			
X.XXX	± 0.05			
ANGULAR	--			
APPROVALS		VIEW	SCALE	PART NO.
DRAWN	TOMA		1:1	ZH-5850-TXXRL
CHECKED	29-OCT-2018			
APPROVED		UNIT	SIZE	DWG NO.
		MM	A4	T6-181014
				REV.
				A1
				SHEET
				1 OF 1

