

RoHS2.0 compliant

REV	DATE	MODIFY

Features:




- * Used in ZH-3100F-H04 Series Housing
- * Accepts AWG #16~18 Wire Range
- * Insulation O.D.= 2.80~3.10 mm(max)
- * Material : Brass or Phosphor Bronze
- * Finish : Tin-Plated or Gold-Plated
- * Qty/Reel : 4,000 PCS
- * Thickness: 0.25mm

Ordering information:


ZH-3100-T X X X L - 1
1 2 3 4 5 6

- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
□BRASS
P:Phosphor bronze
- 5 L=#16~18 (高腳)
- 6 1:Thickness:0.25


标示“”的尺寸须重点管控

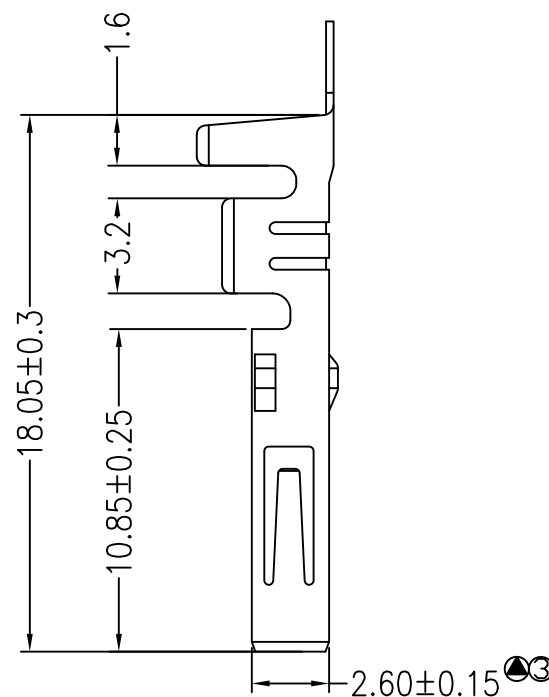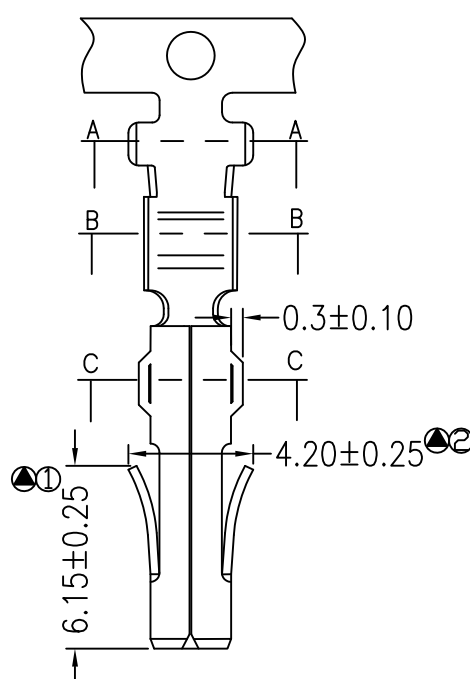

A-A



B-B



C-C



TOLERANCE		 Zen High Precision Industrial Ltd		
X.	---	TITLE 5.08mm (.200") Pitch Crimp Terminal		
X.X	±0.25			
X.XX	±0.15			
X.XXX	±0.05			
ANGULAR	---			
APPROVALS				
DRAWN	TOMA 13-AUG-2013	VIEW 	SCALE 1:1	PART NO. ZH-3100-TXXXL-1
CHECKED		UNIT mm	SIZE A4	REV. AO
APPROVED			DWG NO. TB1-130848	SHEET 1 OF 1