

RoHS2.0compliant

REV	DATE	MODIFY

Features:

- * Used in ZH-3200-HXX Series Housing
- * Accepts AWG #18~22 Wire Range
- * Insulation O.D.= 2.10 mm(max)
- * Material: Brass or Phosphor Bronze
- * Finished: Tin-Plated or Gold-Plated
- * Qty/Reel: 5,000 PCS
- * Thickness: 0.25mm

Ordering information:

ZH-3200-T X X X S
1 2 3 4 5

1 T=Terminal





2 Plated:
T=Tin G=Gold

3 Plated Method:
A: Plated before stamping
B: Stamping before plated

4 Material:
□BRASS
P:Phosphor bronze

5 S:#18~22

标示“”的需重点管控尺寸

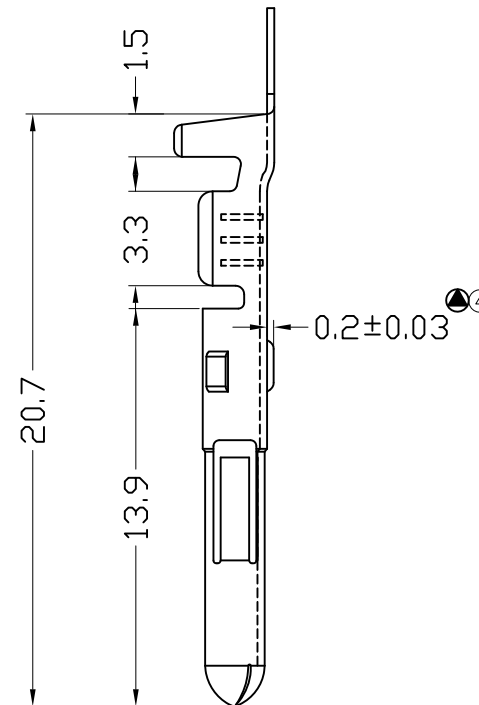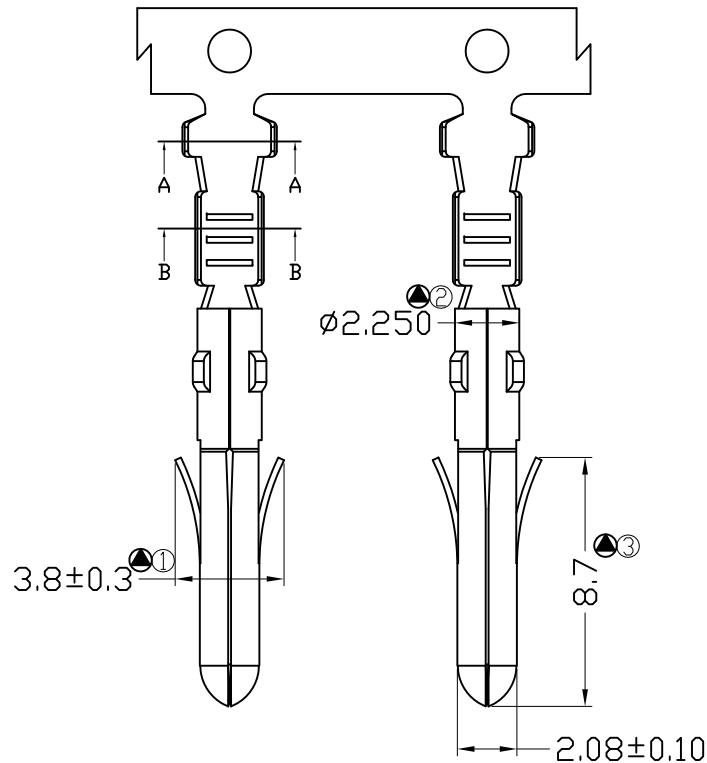

TOLERANCE		 Zen High Precision Industrial Ltd		
X.	--	TITLE 5.08mm (.200") Pitch Crimp Terminal		
X.X	±0.25			
X.XX	±0.15			
X.XXX	±0.05			
ANGULAR	--			
APPROVALS		VIEW		
DRAWN	TOMA		SCALE	PART NO.
CHECKED	28-JUL-2013		1:1	ZH-3200-TXXXS
APPROVED		UNIT	SIZE	DWG NO.
		MM	A4	TB1-130703
				REV.
				A0
				SHEET
				1 OF 1