

RoHS2.0 compliant

REV	DATE	MODIFY



Features:

- * Used in ZH-3100F-H04 Series Housing
- * Accepts AWG #18~22 Wire Range
- * Insulation O.D.= 2.80~3.10 mm(max)
- * Material : Brass or Phosphor Bronze
- * Finish : Tin-Plated or Gold-Plated
- * Qty/Reel : 5,000 PCS
- * Thickness: 0.25mm


Ordering information:

ZH-3100-T X X X S T -1
1 2 3 4 5 6 7


- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
□BRASS
P:Phosphor bronze
- 5 S: 低脚
- 6 T: 新模
- 7 1: Thickness: 0.25mm

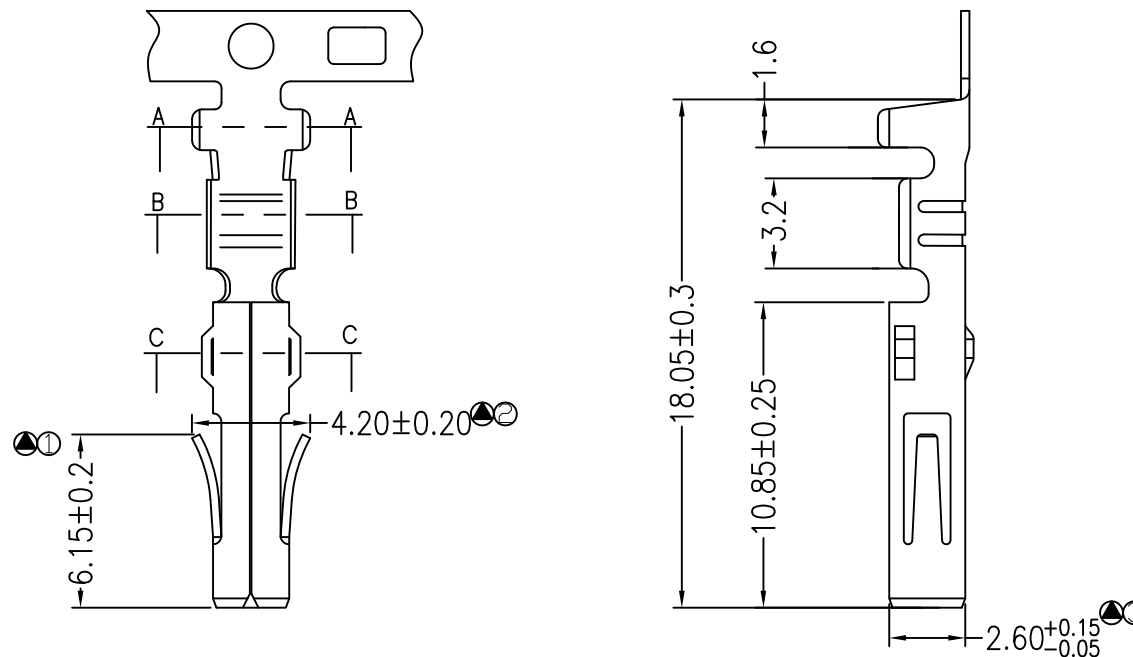

A-A



B-B



C-C

标示“”的尺寸须重点管控



TOLERANCE		Zen High Precision Industrial Ltd		
X.	--			
X.X	±0.25	TITLE 5.08mm (.200") Pitch Crimp Terminal		
X.XX	±0.15			
X.XXX	±0.05			
ANGULAR	--			
APPROVALS		VIEW		
DRAWN	TOMA		SCALE	PART NO.
CHECKED	13-AUG-2013		1:1	ZH-3100-TXXXST-1
APPROVED		UNIT	SIZE	DWG NO.
		mm	A4	TB1-130846
				REV.
				A0
				SHEET
				1 OF 1