



RoHS2.0 compliant

REV	DATE	MODIFY

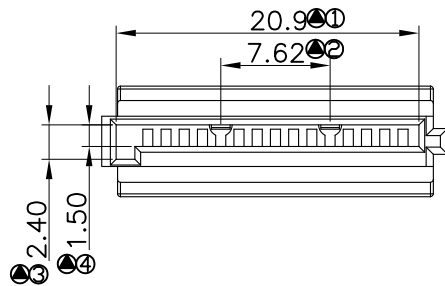

Features:



- * Material: PBT UL 94V-0
- * Accepts ZH-A1271-T Crimp Terminal
- * Terminal Material: Phosphor Bronze/Selective Gold
- * Color: Black

Ordering information:

ZH-A1271-H 15-X
1 2 3

- 1 H=Housing
2 No. of Circuits 15
3 Color:

☐ :Black	☐ :Brown	☐ :Red
☐ :Orange	☐ :Yellow	☐ :Green
☐ :Purple	☐ :Gray	☐ :White
		☐ :Pink

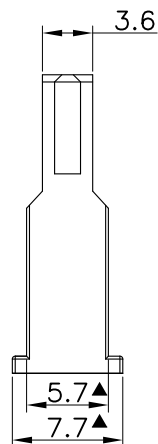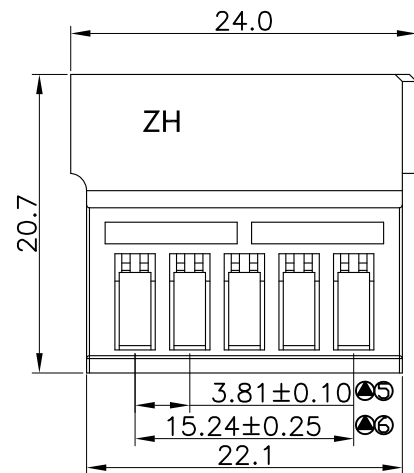

标示“”的尺寸需重点管控



TOLERANCE		Zen High Precision Industrial Ltd.			
X.	--	TITLE 1.27mm(.050") Pitch SATA-15P RECEPTACLE			
X.X	±0.25				
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR	--				
APPROVALS		VIEW	SCALE	PART NO.	REV.
DRAWN	TOMA 25-OCT-2016		1:1	ZH-A1271-H15-X	A0
CHECKED		UNIT	SIZE	DWG NO.	SHEET
APPROVED		MM	A4	H18-161023	1 OF 1

RoHS2.0 compliant

REV	DATE	MODIFY

Features:




- * Used in ZH-A1271-H Series Housing
- * Accepts AWG #18~22 Wire Range
- * Insulation O.D.= 2.1~1.6 mm
- * Material : Phosphor Bronze or Brass
- * Finish : Gold-Plated or Tin-Plated
- * Qty/Reel : 5,000 PCS
- * Thickness: 0.25mm

Ordering information:

ZH-A1271-T X X X S
1 2 3 4 5

- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold H=Selective
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
□BRASS
P:Phosphor bronze
- 5 S: 低脚

标示“”的尺寸需重点管控

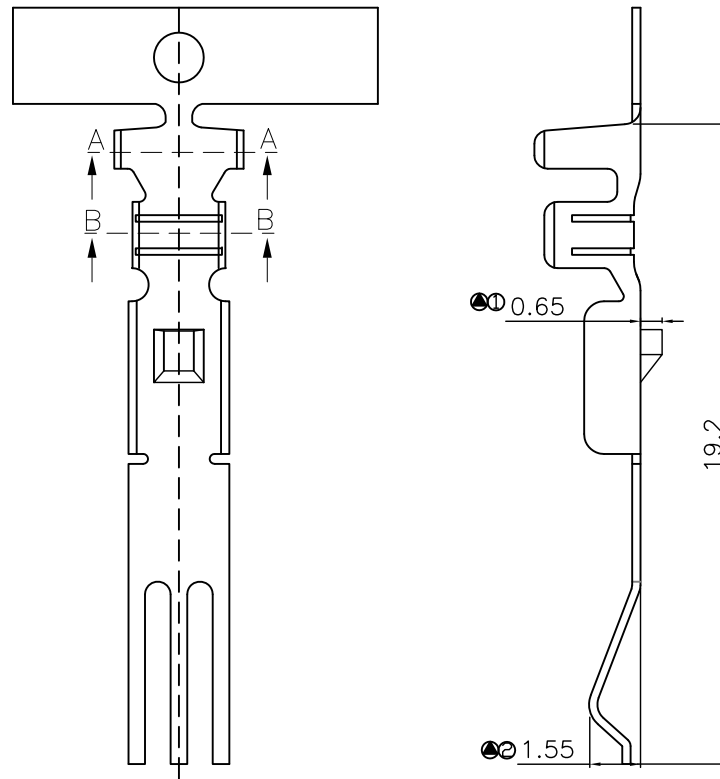

TOLERANCE		 Zen High Precision Industrial Ltd.			
X.	--	TITLE 1.27mm (.050) Pitch SATA Power Cable Receptacle			
X.X	±0.20				
X.XX	±0.15				
X.XXX	±0.10				
ANGULAR	--				
APPROVALS		VIEW 			
DRAWN	TOMA 25-OCT-2016	SCALE F	PART NO. ZH-A1271-TXXXS	REV. A0	
CHECKED		UNIT MM	SIZE A4	DWG NO. T18-161024	SHEET 1 OF 1
APPROVED					

RoHS2.0 compliant

REV	DATE	MODIFY




Features:

- * Used in ZH-A1271-H Series Housing
- * Accepts AWG #18+18 18+20 20+20 Wire Range
- * Insulation O.D.= 2.1~1.6 mm
- * Material : Phosphor Bronze or Brass
- * Finish : Gold-Plated or Tin-Plated
- * Qty/Reel : 5,000 PCS
- * Thickness: 0.25mm

Ordering information:

ZH-A1271-T X X X L
1 2 3 4 5

- 1 T=Terminal
2 Plated:
T=Tin G=Gold H=Selective
3 Plated Method:
A: Plated before stamping
B: Stamping before plated
4 Material:
□BRASS
P:Phosphor bronze
5 L: 高脚

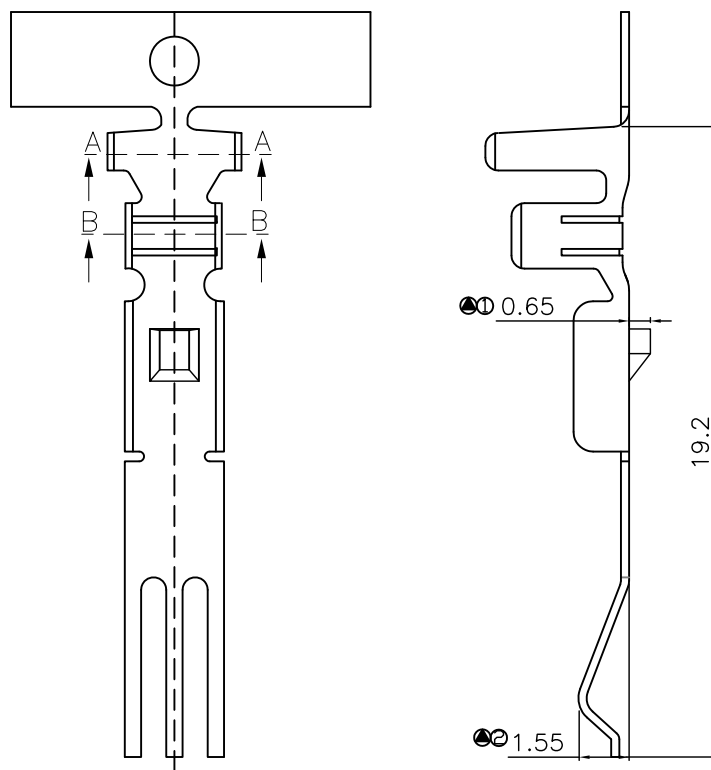

标示“⌀”的尺寸需重点管控

TOLERANCE		 Zen High Precision Industrial Ltd.		
X.	--			
X.X	±0.20	TITLE 1.27mm (.050) Pitch SATA Power Cable Receptacle		
X.XX	±0.15			
X.XXX	±0.10			
ANGULAR	--			
APPROVALS		VIEW		
DRAWN	TOMA 25-OCT-2016		SCALE F	PART NO. ZH-A1271-TXXXL
CHECKED		UNIT MM	SIZE A4	REV. A0
APPROVED			DWG NO. T18-161025	SHEET 1 OF 1

