



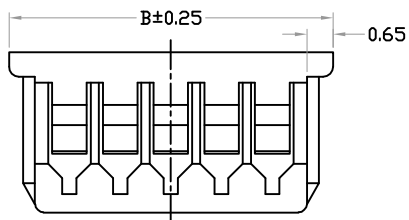


REV	DATE	MODIFY



Features:

- * Available in 02 through 15 Circuits
- * Material: Nylon66 UL94V-0
- * Accepts ZH-0800-T Crimp Terminal
- * Mates with ZH-0800-WXXS or ZH-0800-WXXR Series Wafer

Ordering information:


ZH-0800- $\frac{H}{1}$ $\frac{XX}{2}$ - $\frac{X}{3}$

1 H=Housing


2 No. of Circuits 02~15

3 Color:


☐ Nature	A:Black	B:Brown	C:Red
D:Orange	E:Yellow	F:Green	G:Blue
H:Purple	I:Gray	J:White	K:Pink



4~15PIN



2PIN



3PIN

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2	1.25	4.25	10	11.25	14.25
3	2.50	5.50	11	12.50	15.50
4	3.75	6.75	12	13.75	16.75
5	5.00	8.00	13	15.00	18.00
6	6.25	9.25	14	16.25	19.25
7	7.50	10.50	15	17.50	20.50
8	8.75	11.75			
9	10.00	13.00			

TOLERANCE		 Zen High Precision Industrial Ltd			
X.	--				
X.X	±0.3				
X.XX	±0.2				
X.XXX	±0.1				
ANGULAR	--				
APPROVALS		TITLE 1.25mm (.049") Pitch Housing			
DRAWN	TOMA	VIEW	SCALE	PART NO.	REV.
	02-AUG-2018		F	ZH-0800-HXX-X	A0
CHECKED		UNIT	SIZE	DWG NO.	SHEET
		MM	A4	H17-180801	1 OF 1
APPROVED					



RoHS2.0 compliant

REV	DATE	MODIFY




Features:

- * Mates with ZH-0800-HXX Series Housing
- * Accepts AWG #28~32 Wire Range
- * Insulation O.D.=1.0mm(max)
- * Material:Phosphor Bronze or Brass
- * Finish:Tin-Plated or Gold-Plated
- * Qty/Reel : 15,000 PCS
- * Thickness: 0.15mm


Ordering information:

ZH-0800-T X X X
1 2 3 4


- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
□BRASS
P:Phosphor bronze

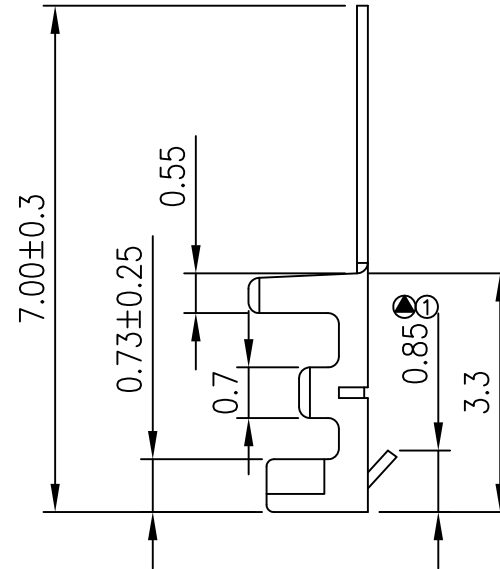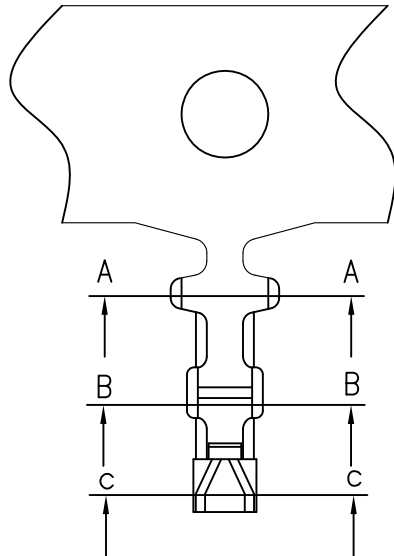

A-A



B-B

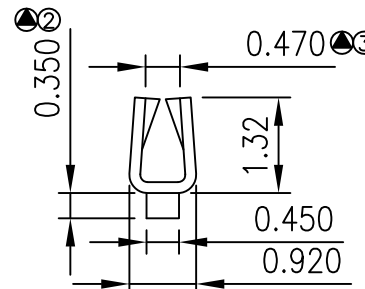

C-C







标示“●”的尺寸须重点管控

TOLERANCE		Zen High Precision Industrial Ltd.			
X.	--				
X.X	±0.25				
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR	--				
APPROVALS		TITLE			
DRAWN	TOMA	VIEW		SCALE	PART NO.
	08-AUG-2013			1:1	ZH-0800-TXXX
CHECKED		UNIT		SIZE	DWG NO.
		MM		A4	TB1-130831
APPROVED					SHEET
					1 OF 1



RoHS2.0 compliant

REV	DATE	MODIFY

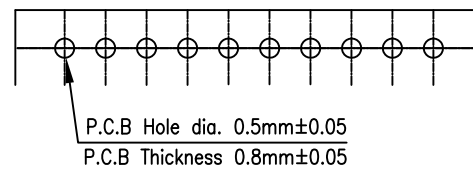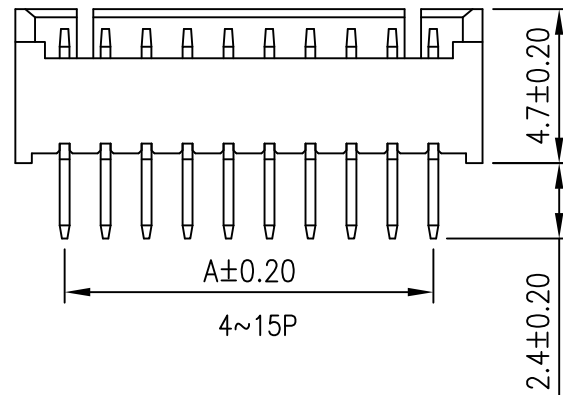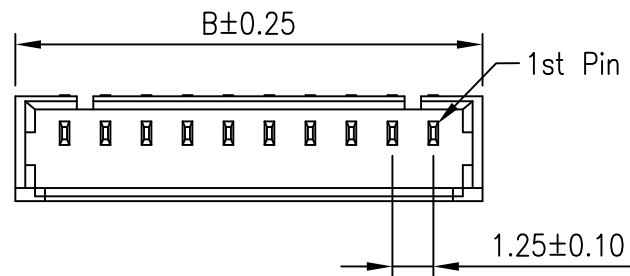

Circuits	Dimension mm	
	A	B
2	1.25	4.25
3	2.50	5.50
4	3.75	6.75
5	5.00	8.00
6	6.25	9.25
7	7.50	10.50
8	8.75	11.75
9	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75
13	15.00	18.00
14	16.25	19.25
15	17.50	20.50
16	18.50	21.75

Features:

- * Material: Nylon 66/46/6T/9T UL94V-0
- * Accepts ZH-0800-HXX Series Housing
- * Terminal Material: Brass/Tin-Plated or Gold-Plated

Ordering information:

ZH-0800-W XX S X X-X
1 2 3 4 5 6

- 1 W=Wafer
- 2 No. of Circuits 02~16
- 3 S=Straight
- 4 Plated: T=Tin G=Gold
- 5 Material: ☐ NY46
46 NY66
6T NY6T
9T NY9T
- 6 Color:

☐ Nature	A:Black	B:Brown	C:Red
D:Orange	E:Yellow	F:Green	G:Blue
H:Purple	I:Gray	J:White	K:Pink

TOLERANCE		Zen High Precision Industrial Ltd			
X.	--	TITLE 1.25mm (.049") Pitch Wafer			
X.X	±0.25				
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR	--				
APPROVALS		VIEW			
DRAWN	TOMA 06-AUG-2018		SCALE	PART NO.	REV.
CHECKED			F	ZH-0800-WXXSXX-X	AO
APPROVED		UNIT	SIZE	DWG NO.	SHEET
		MM	A4	W21-180805	1 OF 1

