

RoHS2.0 compliant

REV	DATE	MODIFY

Features:




- * Available in 02 through 16 Circuits
- * Material: Nylon 66 UL94V-0
- * Accepts ZH-1160-T Crimp Terminal
- * Color: Natural(White)

PART NO.	Dimensions	
	A	B
A1500H-02P	1.50	4.50
A1500H-03P	3.00	6.00
A1500H-04P	4.50	7.50
A1500H-05P	6.00	9.00
A1500H-06P	7.50	10.50
A1500H-07P	9.00	12.00
A1500H-08P	10.50	13.50
A1500H-09P	12.00	15.00
A1500H-10P	13.50	16.50
A1500H-11P	15.00	18.00
A1500H-12P	16.50	19.50
A1500H-13P	18.00	21.00
A1500H-14P	19.50	22.50
A1500H-15P	21.00	24.00
A1500H-16P	22.50	25.50

Ordering information:

ZH-1160-H XX C
1 2 3

- 1 H=Housing
2 No. of Circuits 02~15
3 C: 圆孔

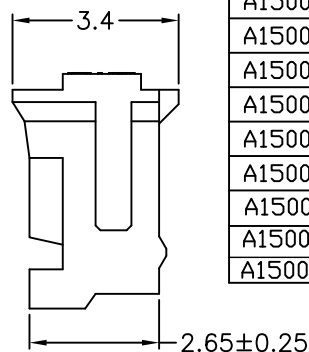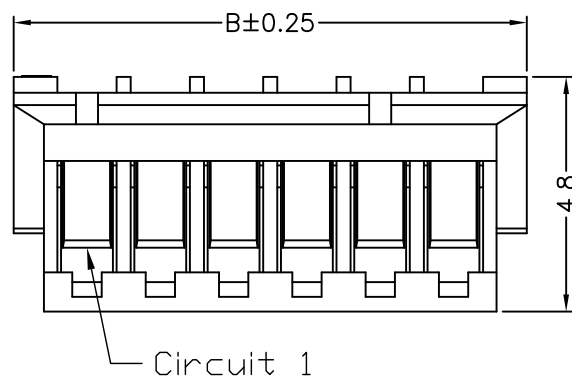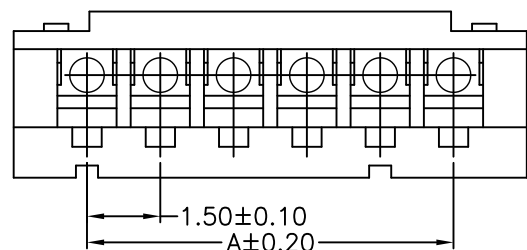




标示“●”的尺寸需重点管控




TOLERANCE		ZH Connector Zen High Precision Industrial Ltd			
X.	--				
X.X	±0.25				
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR	--				
APPROVALS		TITLE			
		1.50mm (.059”) Pitch Housing			
DRAWN	TOMA	VIEW	SCALE	PART NO.	REV.
19-OCT-2018			1:1	ZH-1160-HXXC	X0
CHECKED		UNIT	SIZE	DWG NO.	SHEET
APPROVED		MM	A4		1 OF 1

RoHS2.0 compliant


REV	DESCRIPTION	DATE

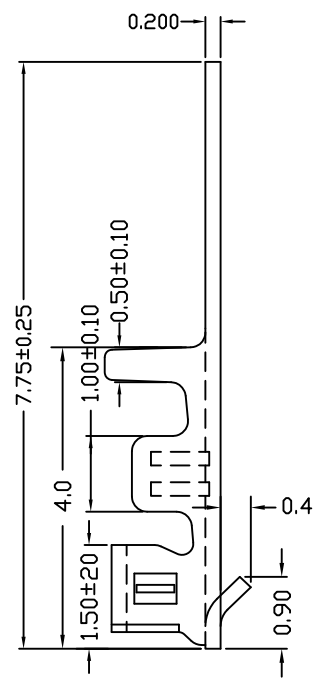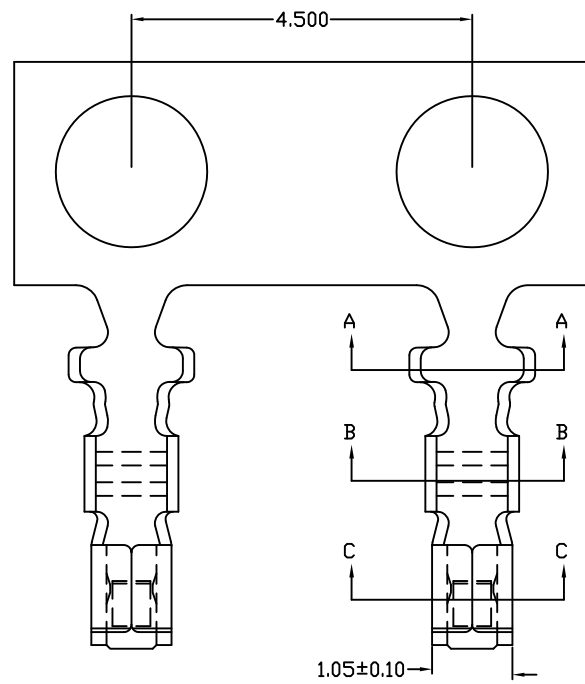

SECTION A-A



SECTION B-B



SECTION C-C

Features:

- * Used in ZH-1160-HXX Series Housing
- * Accepts AWG #26~30 Wire Range
- * Insulation O.D.= 0.90 mm(max)
- * Material : Phosphor Bronze or Brass
- * Finish : Tin-Plated or Gold-Plated
- * Qty/Reel : 15,000 PCS
- * Thickness: 0.20mm

Ordering information:

ZH-1160-T X X X
1 2 3 4

- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
□BRASS
P:Phosphor bronze



TOLERANCE		ZH Connector Zen High Precision Industrial Ltd			
X.	--				
X.X	±0.25	TITLE 1.50mm (.059") Pitch Crimp Terminal			
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR	--	APPROVALS			
DRAWN	TOMA	VIEW	SCALE	PART NO.	REV.
	27-AUG-2019		1:1	ZH-1160-TXXX	X0
CHECKED		UNIT	SIZE	DWG NO.	SHEET
APPROVED		MM	A4		1 OF 1