



RU® E363554

RoHS2.0 compliant

REV	DESCRIPTION	DATE

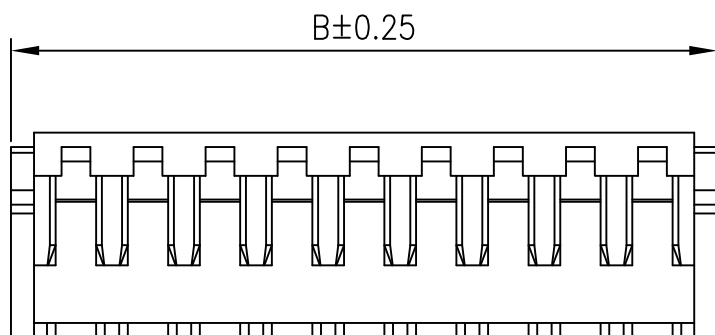

Features:


- * Available in 2 through 15 Circuits
- * Material: Nylon 66 UL94V-0
- * Accepts YY-1150-T Crimp Terminal
- * Mates with YY-1150-WXXS or YY-1150-WXXR Series Wafer
- * Color: White

Ordering information:

ZH-1150-H XX
I 2

1 H=Housing

2 No. of Circuits 02~15

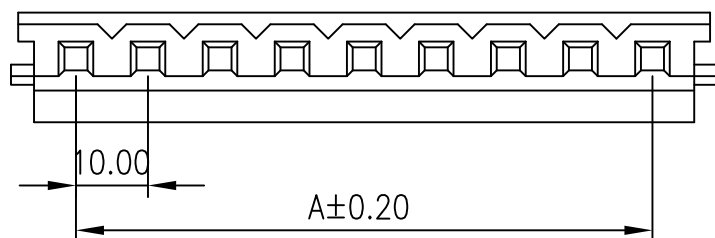


Circuits	Dimension mm		
	A	B	
2	2.5	7.0	
3	5.0	9.5	
4	7.5	12.0	
5	10.0	14.5	
6	12.5	17.0	
7	15.0	19.5	
8	17.5	22.0	
9	20.0	24.5	
10	22.5	27.0	
11	25.0	29.5	
12	27.5	32.0	
13	30.0	34.5	
14	32.5	37.0	
15	35.0	39.5	

TOLERANCE		ZH Connector Zen High Precision Industrial Ltd			
X.	--				
X.X	±0.25				
X.XX	±0.15				
X.XXX	±0.08				
ANGULAR		TITLE			
		2.50mm (.098") Pitch Housing			
APPROVALS					
DRAWN	CHEN	VIEW	SCALE	PART NO.	REV.
03-DEC-2008			1:1	ZH-1150-HXX	A0
CHECKED		UNIT	SIZE	DWG NO.	SHEET
		MM	A4	A2501H014	1 OF 1
APPROVED					



RoHS2.0 compliant

REV	DATE	MODIFY

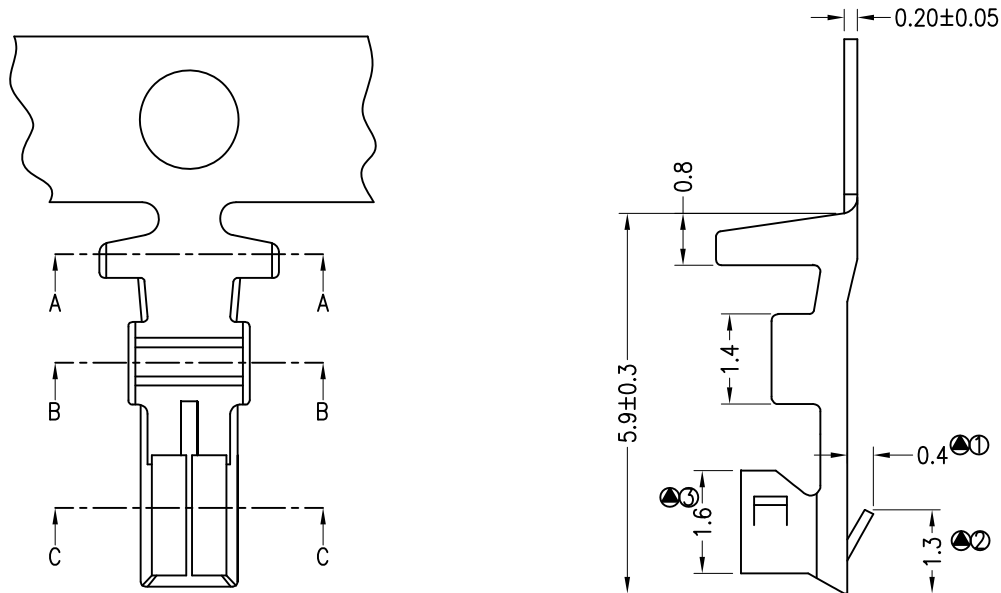


Features:

- * Used in ZH-1150-H crimp housing
- * Accepts AWG #24~30 Wire Range
- * Insulation O.D.=1.80mm
- * Material : Brass or Phosphor bronze
- * Finished: Tin-Plated or Gold-Plated
- * Thickness: 0.20mm


Ordering information:

ZH-1150-TXXX
1 2 3 4


- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
□BRASS
P:Phosphor bronze



SEC:A-A



SEC:B-B



SEC:C-C

标示“”的尺寸须重点管控

TOLERANCE		ZH Corporation Zen High Precision Industrial Ltd			
X.	--				
X.X	±0.25				
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR		TITLE			
		2.50mm (.098") Pitch Terminal			
APPROVALS					
DRAWN TOMA 13-JUN-2019		VIEW 	SCALE 1:1	PART NO. ZH-1150-TXXX	REV. A0
CHECKED		UNIT MM	SIZE A4	DWG NO. T6-190604	SHEET 1 OF 1
APPROVED					

