


RoHS2.0 compliant

REV	DATE	MODIFY

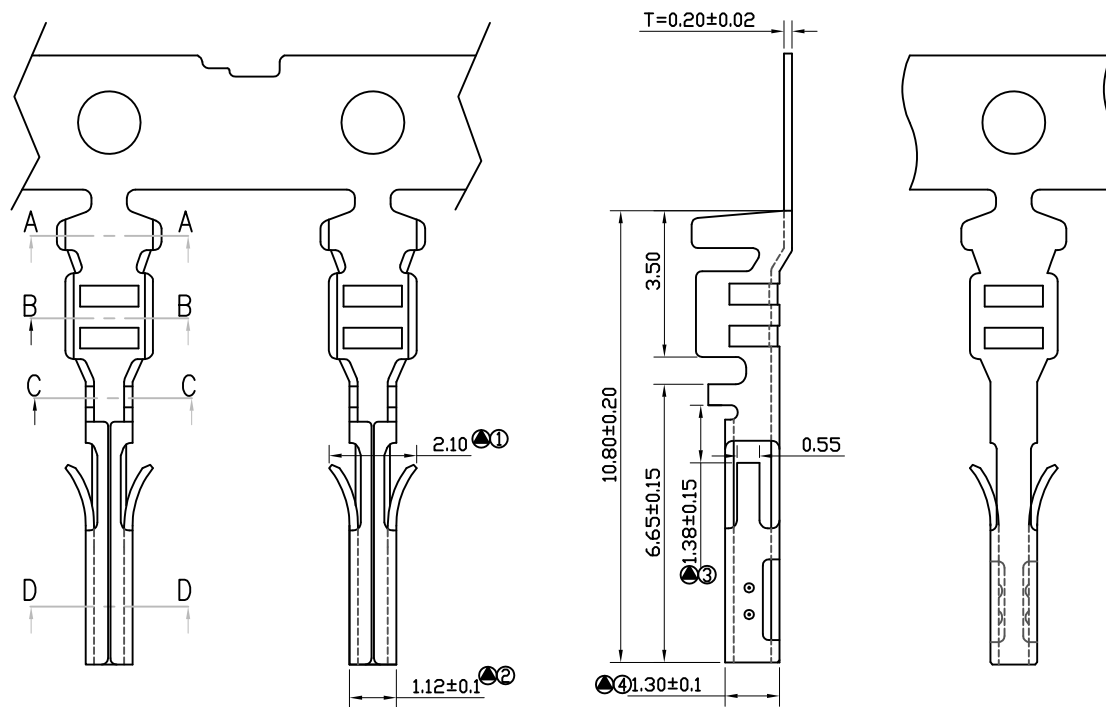


Features:

- * Used in ZH-5750-H crimp housing
- * Accepts AWG #20~24 Wire Range
- * Insulation O.D.= 1.80mm (max)
- * Material : Brass or Phosphor bronze
- * Finished: Tin-Plated or Gold-Plated
- * Qty/Reel: 10,000 PCS
- * Thickness: 0.20mm


Ordering information:

ZH-5750-TXXXS
1 2 3 4 5


- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
□BRASS
P:Phosphor bronze
- 5 S:Low Heel




SEC:A-A



SEC:B-B



SEC:C-C



SEC:D-D

标示“”的尺寸重点确认



TOLERANCE		 Zen High Precision Industrial Ltd		
X.	---			
X.X	±0.25	TITLE 3.00mm (.118") Pitch Crimp Terminal		
X.XX	±0.15			
X.XXX	±0.05			
ANGULAR	---			
APPROVALS		VIEW		
DRAWN	TOMA		SCALE	PART NO.
CHECKED	19-MAY-2015		1:1	ZH-5750-TXXXS
APPROVED		UNIT	SIZE	DWG NO.
		MM	A4	T6-150517
				REV.
				A0
				SHEET
				1 OF 1