

RoHS2.0 compliant

REV	DATE	MODIFY

Features:






- * Used in ZH-5750-H crimp housing
- * Accepts AWG #16~22 Wire Range
- * Insulation O.D.= 2.10mm (max)
- * Material : High conductivity copper
- * Finished: Tin-Plated or Gold-Plated
- * Qty/Reel: 10,000 PCS
- * Thickness: 0.20mm

Ordering information:

ZH-5750-TXXRLT
1 2 3 4 5 6

- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
R: High conductivity copper
- 5 L: High Heel
- 6 T:新型端

标示“”的尺寸重点确认

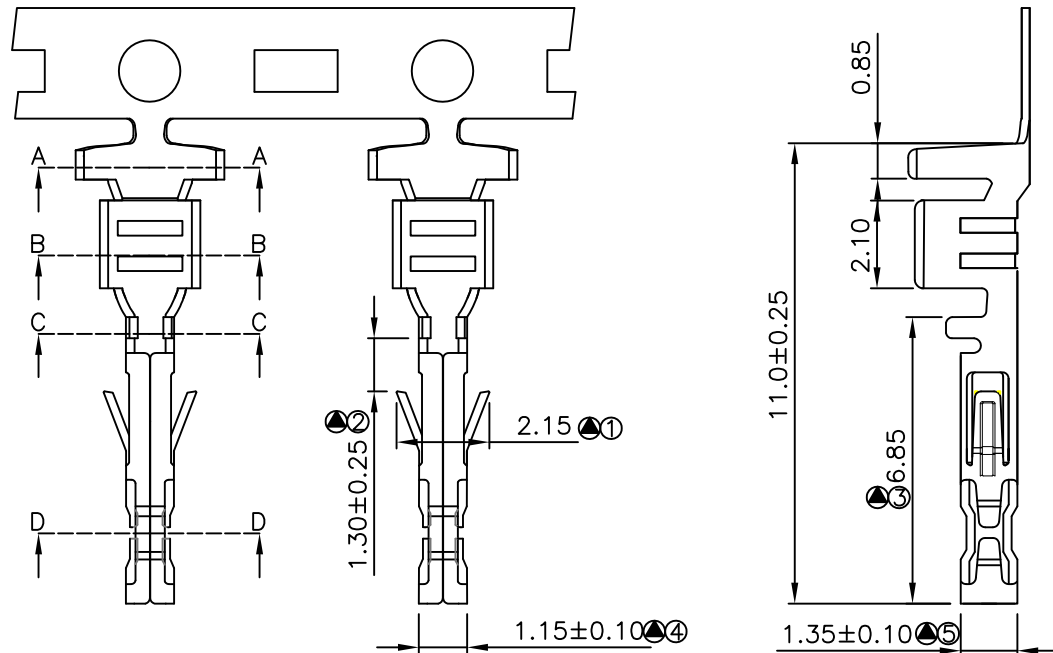

TOLERANCE		 Zen High Precision Industrial Ltd			
X.	--				
X.X	±0.25	TITLE 3.00mm (.118") Pitch Crimp Terminal			
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR	--				
APPROVALS					
DRAWN	TOMA	VIEW	SCALE	PART NO.	REV.
21-SEP-2015			1:1	ZH-5750-TXXRLT	A0
CHECKED		UNIT	SIZE	DWG NO.	SHEET
APPROVED		MM	A4	TB1-150913	1 OF 1