

RoHS2.0 compliant

REV	DATE	MODIFY

Features:



- * Used in ZH-5750-H crimp housing
- * Accepts AWG #24~30 Wire Range
- * Insulation O.D.= 1.10mm (max)
- * Material : High conductivity copper
- * Finished: Tin-Plated or Gold-Plated
- * Qty/Reel: 10,000 PCS
- * Thickness: 0.20mm

Ordering information:

ZH-5750-TXXR ST
1 2 3 4 5 6

- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
R:High conductivity copper
- 5 S: Low Heel
- 6 T:新型端

标示“”的尺寸重点确认

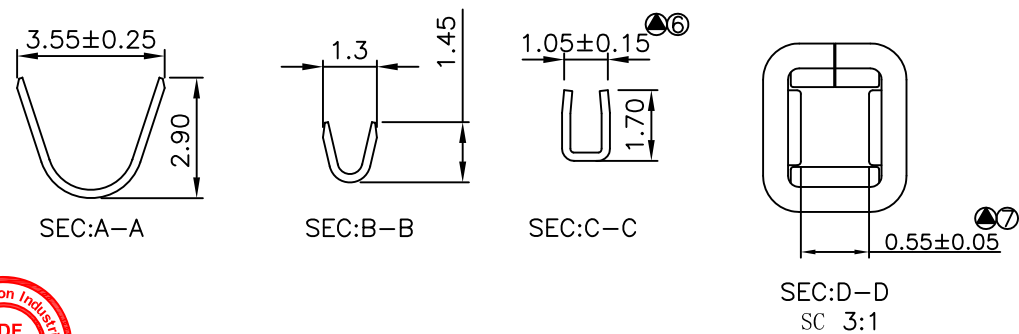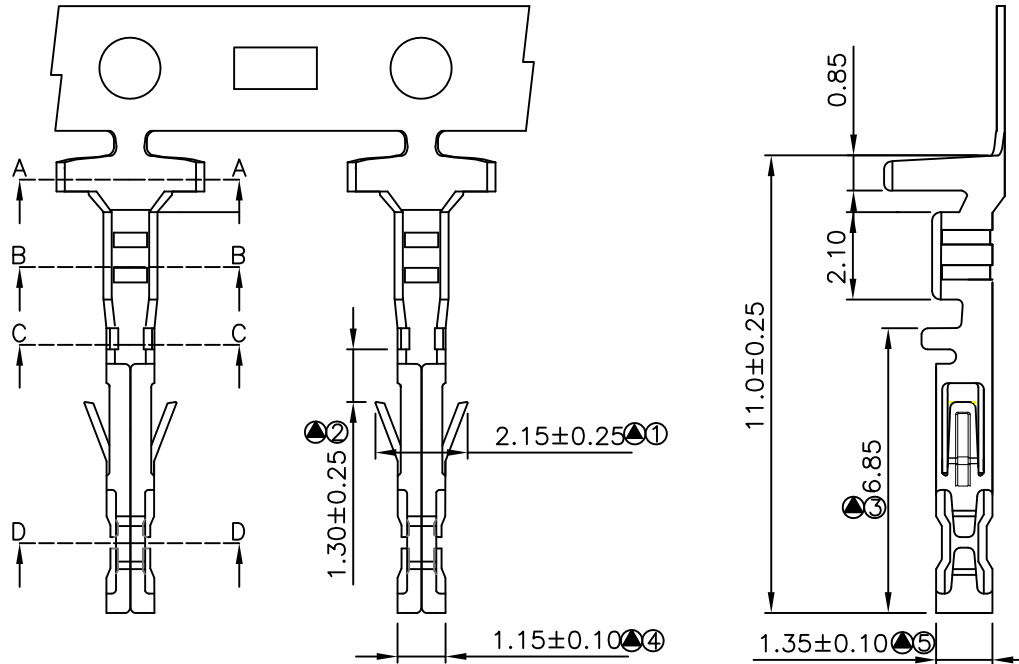

TOLERANCE		 Zen High Precision Industrial Ltd		
X.	--	TITLE 3.00mm (.118") Pitch Crimp Terminal		
X.X	±0.25			
X.XX	±0.15			
X.XXX	±0.05			
ANGULAR	--			
APPROVALS		VIEW	SCALE	PART NO.
DRAWN	TOMA		1:1	ZH-5750-TXXXST
CHECKED	21-SEP-2015	UNIT	SIZE	DWG NO.
APPROVED		MM	A4	TB1-150913
		REV.	SHEET	
		A0	1 OF 1	