

RoHS2.0 compliant

REV	DATE	MODIFY


Features:

- * Used in ZH-5700-H crimp housing
- * Accepts AWG #16+16 16+18 18+18 Wire Range
- * Insulation O.D.=3.8mm MAX
- * Material : High conductivity copper
- * Finished: Tin-Plated or Gold-Plated
- * Qty/Reel: 3,500 PCS
- * Thickness: 0.20mm

Ordering information:

ZH-5700-T X X R L E T-2
1 2 3 4 5 6 7

- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
R: High conductivity copper
- 5 LE: 特高脚
- 6 T: 新型端
- 7 2: 2代

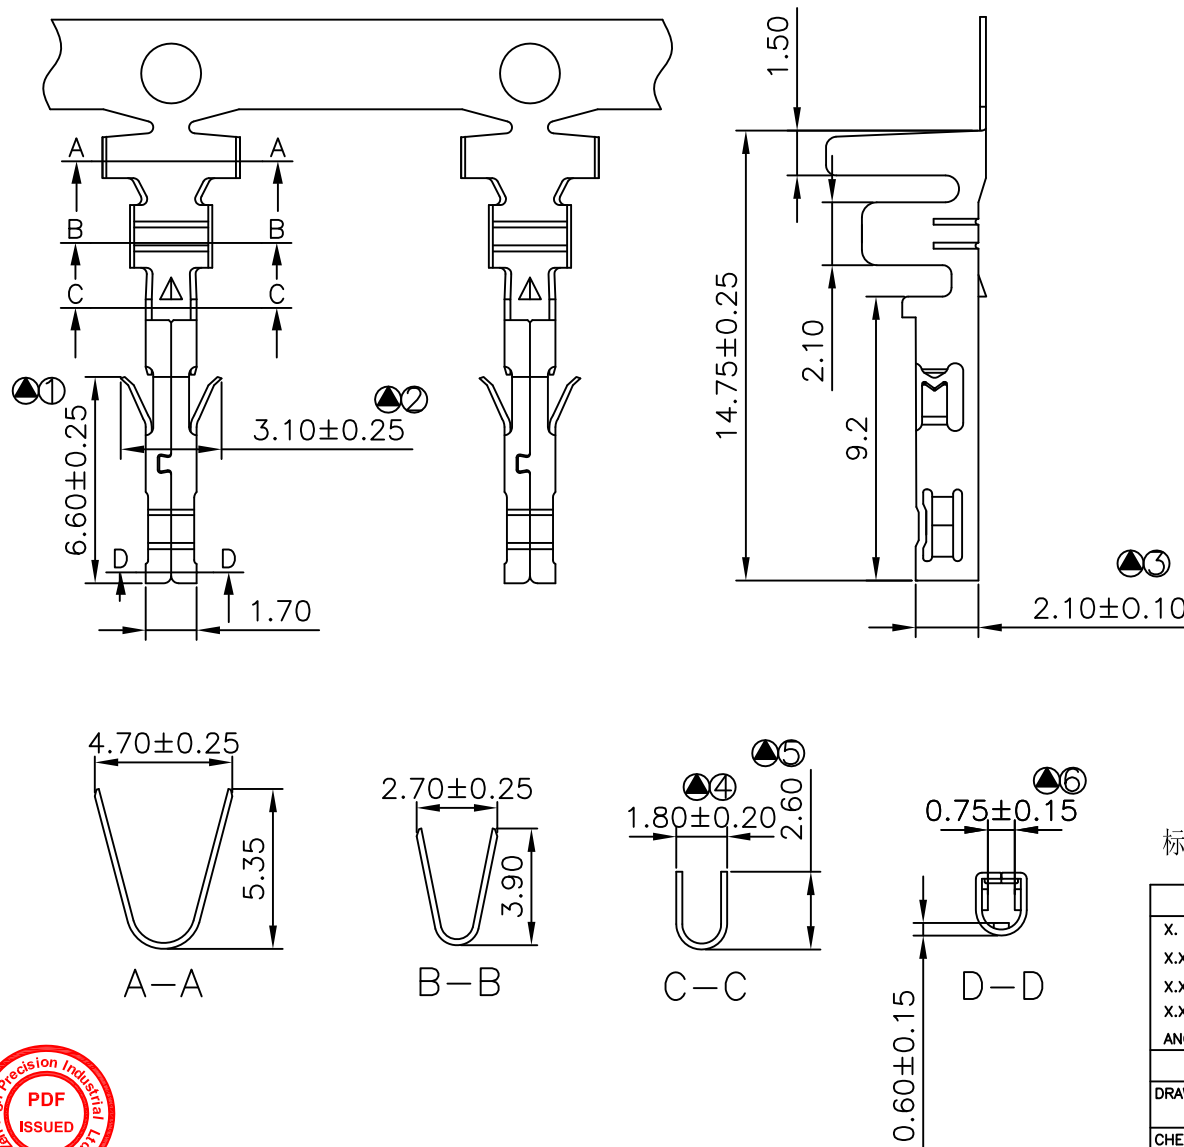

标示“”的尺寸需重点管控

TOLERANCE		Zen HighPrecision Industrial Ltd			
X.	--	TITLE 4.20mm (.165") Pitch High Current Terminal			
X.X	± 0.25				
X.XX	± 0.15				
X.XXX	± 0.05				
ANGULAR	--				
APPROVALS		REV.			
DRAWN	TOMA 31-MAY-2021	VIEW	SCALE	PART NO.	REV.
CHECKED			1:1	ZH-5700-TXXRLET-2	A0
APPROVED		UNIT	SIZE	DWG NO.	SHEET
		MM	A4	TB1-210502	1 OF 1

