



RI® E363554

RoHS 2.0 compliant


REV	DATE	MODIFY
A1	2015/07/13	Liu Juan

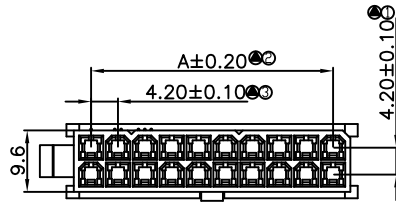


06~24Pin




04Pin






02Pin




02Pin




04Pin




06~12Pin

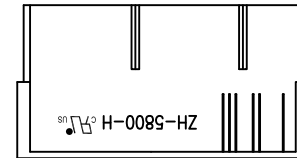

14~20Pin

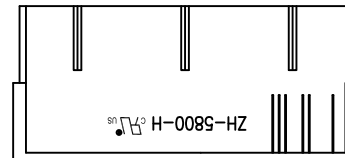

22~24Pin

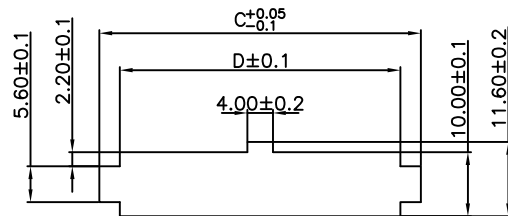

RECOMMENDED PANEL HOLE DIMENSION
(THICKNESS:0.8~2.0)

Features:

- * Available In 02 Through 24 Circuits
- * Material: Nylon66 UL94V-0
- * Accepts ZH-5800-T Crimp Terminal
- * Mates With ZH-5700-HXX Series Housing

Ordering information:

ZH-5800-H XX F X Q - X
1 2 3 4 5 6

- 1 H:Housing
- 2 No. of Circuits 02~24
- 3 F: Without Ears
- 4 ☐ Mark
N:Without Mark
- 5 Q:Nylon66 UL94V-0
- 6 Color:

☐ Nature	A:Black	B:Brown	C:Red
D:Orange	E:Yellow	F:Green	G:Blue
H:Purple	I:Gray	J:White	K:Pink

标示“”的尺寸须重点管控

Circuits	Dimension mm			
	A	B	C	D
1X2		5.4	10.8	5.8
2X2	4.2	9.6	15.0	10.0
2X3	8.4	13.8	19.2	14.2
2X4	12.6	18.0	23.4	18.4
2X5	16.8	22.2	27.6	22.6
2X6	21.0	26.4	31.8	26.8
2X7	25.2	30.6	36.0	31.1
2X8	29.4	34.8	40.2	35.3
2X9	33.6	39.0	44.4	39.5
2X10	37.8	43.2	48.6	43.7
2X11	42.0	47.4	52.8	47.9
2X12	46.2	51.6	57.0	52.0

TOLERANCE		Zen High Precision Industrial Ltd			
X.	--				
X.X	±0.25	TITLE 4.2mm (.165") Pitch Housing			
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR	--	APPROVALS			
DRAWN	TOMA	VIEW	SCALE	PART NO.	REV.
	19-AUG-2013		1:1	ZH-5800-HXXFXQ-X	A1
CHECKED		UNIT	SIZE	DWG NO.	SHEET
		MM	A4	HB2-130837	1 OF 1
APPROVED					

