

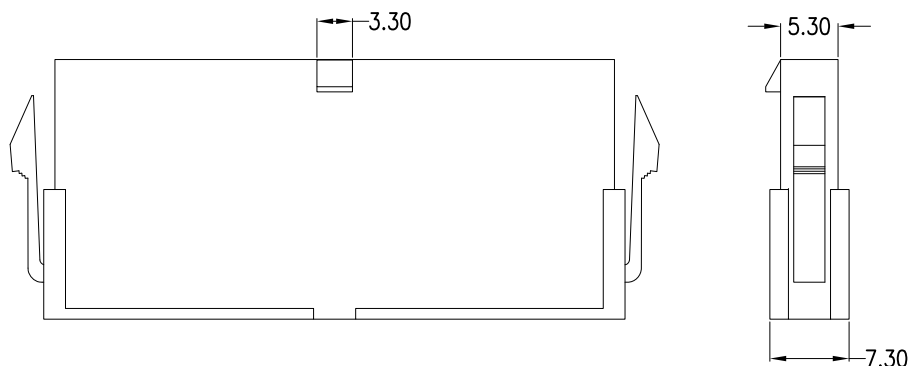




RI E363554

RoHS2.0 compliant

Circuits	Dimension mm	
	A	B
2	4.2	11.7
3	8.4	15.9
4	12.6	20.1
5	16.8	24.3
6	21.0	28.5
7	25.2	32.7
8	29.4	36.9
9	33.6	41.1
10	37.8	45.3
11	42.0	49.5
12	46.2	53.7



SEC:A-A

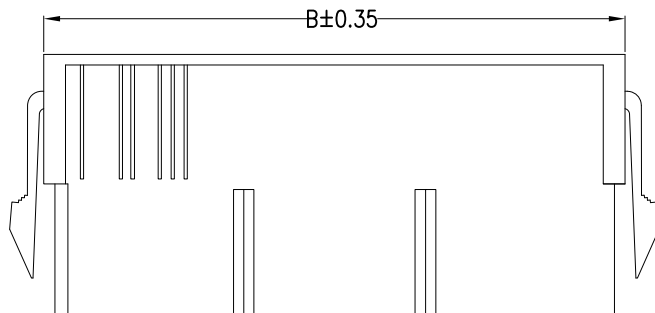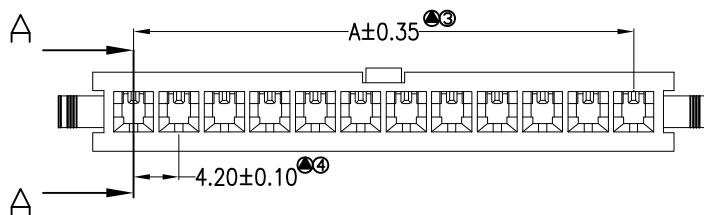

Features:

- * Available In 02 Through 12 Circuits
- * Material: Nylon 66 UL94V-0
- * Accepts ZH-5800-T Crimp Terminal
- * Mates with ZH-5700-HXXS series Housing

Ordering information:

ZH-5800-H XX G S Q-X
1 2 3 4 5 6

- 1 H:Housing
- 2 No. of Circuits 02~12
- 3 G General/常规
- 4 S:Single Row/单排
- 5 Q:Nylon66 UL94V-0
- 6 Color:

☐ Nature	A:Black	B:Brown	C:Red
D:Orange	E:Yellow	F:Green	G:Blue
H:Purple	I:Gray	J:White	K:Pink

标示“ ”的尺寸须重点管控

TOLERANCE		Zen High Precision Industrial Ltd.		
X.	--			
X.X	±0.25	TITLE		
X.XX	±0.20			
X.XXX	±0.05	4.2mm (.165") Pitch Housing		
ANGULAR	--			
APPROVALS		VIEW		
DRAWN	TOMA		SCALE	PART NO.
CHECKED	13-AUG-2020		F	ZH-5800-HXXGSQ-X
APPROVED		UNIT	SIZE	REV.
		mm	A4	A0
		DWG NO.		SHEET
		H17-200803		1 OF 1

