

RoHS2.0 compliant

REV	DATE	MODIFY







Features:

- * Used in ZH-5800-HXX Series Housing
- * Accepts AWG #18~22 Wire Range
- * Insulation O.D.= 3.1 mm(max)
- * Material : High conductivity copper
- * Finish : Tin-Plated or Gold-Plated
- * Qty/Reel : 4,000 PCS
- * Thickness: 0.2mm

Ordering information:

ZH-5800-T X X R M - A
1 2 3 4 5 6

- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
R:High conductivity copper
- 5 M: Middle foot 中脚
- 6 A: Advanced Edition

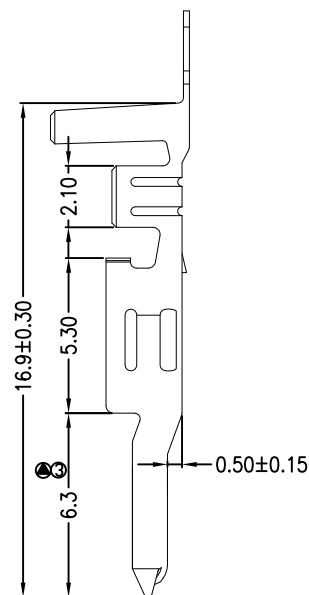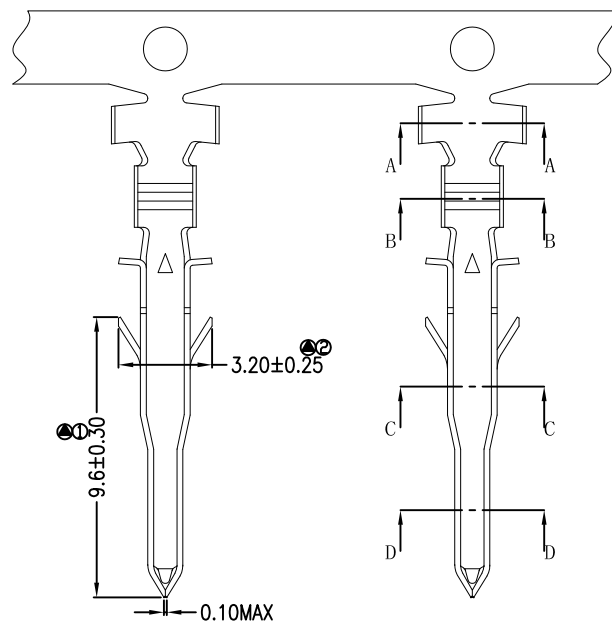

标示“”的尺寸须重点管控



TOLERANCE		ZH Connector Zen High Precision Industrial Ltd			
X.	--	TITLE 4.20mm (.165") Pitch Crimp Terminal			
X.X	±0.25				
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR	--				
APPROVALS					
DRAWN	TOMA 30—OCT—2020	VIEW 	SCALE 1:1	PART NO. ZH-5800—TXXRM—A	REV. A0
CHECKED		UNIT MM	SIZE A4	DWG NO. T23-201003	SHEET 1 OF 1
APPROVED					