



RI E363554

RoHS 2.0 compliant


REV	DATE	MODIFY
A1	2015/07/13	Liu Juan

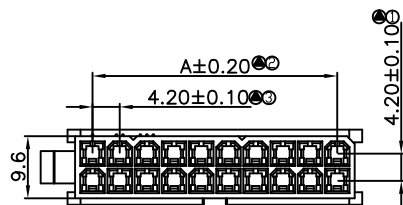

06~24Pin




04Pin



02Pin



02Pin



04Pin

Features:




- * Available In 02 Through 24 Circuits
- * Material: Nylon 66 UL94V-2
- * Accepts ZH-5800-T Crimp Terminal
- * Mates With ZH-5700-HXX Series Housing

Ordering information:


ZH-5800-H $\frac{XX}{1}$ $\frac{F}{2}$ $\frac{X}{3}$ $\frac{X}{4}$ $\frac{X}{5}$ - $\frac{X}{6}$

- 1 H:Housing
- 2 No. of Circuits 02~24
- 3 F: Without Ears
- 4 $\square$:Mark
N:Without Mark
- 5 $\square$:Nylon 66 UL94V-2
- 6 Color:


$\square$:Nature	A:Black	B:Brown	C:Red
D:Orange	E:Yellow	F:Green	G:Blue
H:Purple	I:Gray	J:White	K:Pink




06~12Pin



14~20Pin

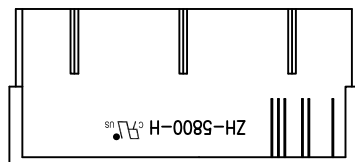

22~24Pin

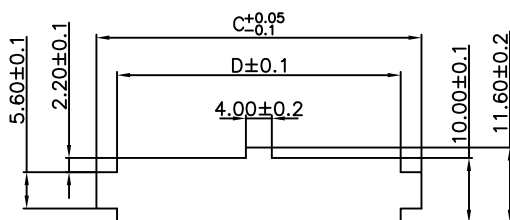

RECOMMENDED PANEL HOLE DIMENSION
(THICKNESS:0.8~2.0)

标示“ $\triangle$ ”的尺寸须重点管控

Circuits	Dimension mm			
	A	B	C	D
1X2	4.2	5.4	10.8	5.8
2X2	4.2	9.6	15.0	10.0
2X3	8.4	13.8	19.2	14.2
2X4	12.6	18.0	23.4	18.4
2X5	16.8	22.2	27.6	22.6
2X6	21.0	26.4	31.8	26.8
2X7	25.2	30.6	36.0	31.1
2X8	29.4	34.8	40.2	35.3
2X9	33.6	39.0	44.4	39.5
2X10	37.8	43.2	48.6	43.7
2X11	42.0	47.4	52.8	47.9
2X12	46.2	51.6	57.0	52.0

TOLERANCE		Zen High Precision Industrial Ltd		
X.	---			
X.X	±0.25	TITLE		
X.XX	±0.15			
X.XXX	±0.05	4.2mm (.165") Pitch Housing		
ANGULAR	---			
APPROVALS		PART NO.		
DRAWN	TOMA			
	19-AUG-2013	ZH-5800-HXXFXX-X		
CHECKED				
APPROVED		DWG NO.		
		HB2-130837		
		SHEET		
		1 OF 1		

