
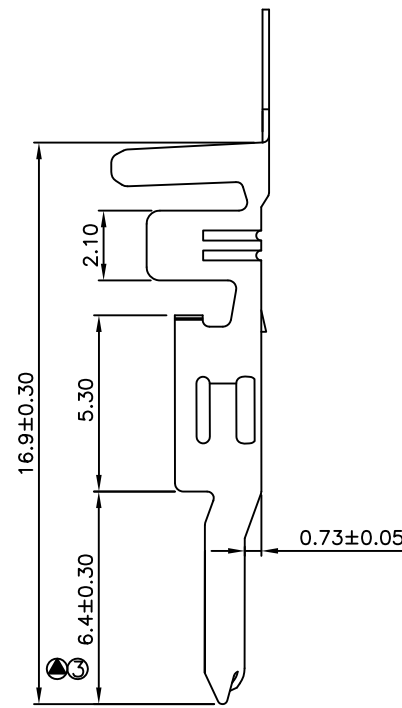


RoHS2.0 compliant

REV	DATE	MODIFY

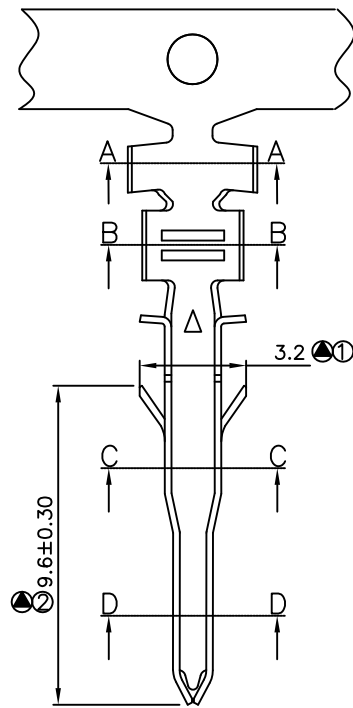


Features:

- * Used in ZH-5800-HXX Series Housing
- * Accepts AWG #16+18~18 Wire Range
- * Insulation O.D.= 3.1 mm(max)
- * Material : Brass or Phosphor Bronze
- * Finish : Tin-Plated or Gold-Plated
- * Qty/Reel : 4,000 PCS
- * Thickness: 0.2mm


Ordering information:

ZH-5800-T X X X L
1 2 3 4 5


- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
□BRASS
P:Phosphor bronze
- 5 L: High foot 高脚




A-A



B-B



C-C



D-D

标示“”的尺寸须重点管控

TOLERANCE		 Zen High Precision Industrial Ltd			
X.	--				
X.X	±0.25				
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR	--				
APPROVALS		TITLE			
DRAWN	TOMA	4.20mm (.165") Pitch Crimp Terminal			
CHECKED	30-AUG-2017				
APPROVED		VIEW	SCALE	PART NO.	REV.
			1:1	ZH-5800-TXXXLN	A0
		UNIT	SIZE	DWG NO.	SHEET
		MM	A4	TB1-170812	1 OF 1

