

RoHS2.0 compliant

REV	DATE	MODIFY







Features:

- * Used in ZH-5800-HXX Series Housing
- * Accepts AWG #18~22 Wire Range
- * Insulation O.D.= 3.1 mm(max)
- * Material : Brass or Phosphor Bronze
- * Finish : Tin-Plated or Gold-Plated
- * Qty/Reel : 4,000 PCS
- * Thickness: 0.2mm

Ordering information:

ZH-5800-T X X X M - A
1 2 3 4 5 6

- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
□BRASS
P:Phosphor bronze
- 5 M: Middle foot 中脚
- 6 A: Advanced Edition

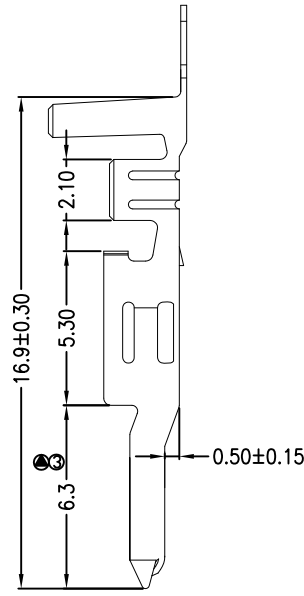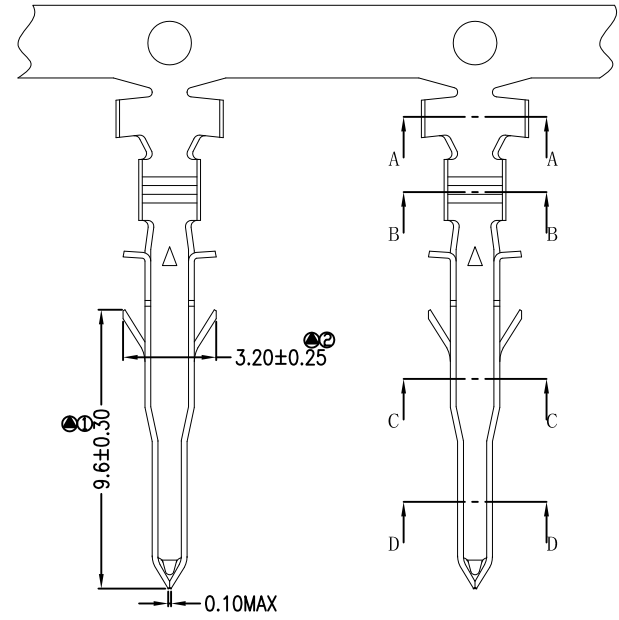

标示 “ ” 的尺寸须重点管控



TOLERANCE		Zen High Precision Industrial Ltd		
X.	---			
X.X	±0.25	TITLE 4.20mm (.165") Pitch Crimp Terminal		
X.XX	±0.15			
X.XXX	±0.05			
ANGULAR	---			
APPROVALS		VIEW	SCALE	PART NO.
DRAWN	TOMA 30-OCT-2020		1:1	ZH-5800-TXXXM-A
CHECKED		UNIT	SIZE	DWG NO.
APPROVED		MM	A4	T23-201003
				REV. AO
				SHEET 1 OF 1