

RoHS2.0 compliant

REV	DATE	MODIFY


Features:

- * Used in ZH-3200-H04 Housing
- * Accepts AWG #16~20 Wire Range
- * Insulation O.D.= 2.30 mm(max)
- * Material : Brass or Phosphor Bronze
- * Finished: Tin-Plated or Gold-Plated
- * Qty/Reel: 5,000 PCS
- * Thickness: 0.25mm
- * 80u" Tin Plated Over 30~50u" Nickel
- * G/F Au Gold Plated Over 30~50u" Nickel

Ordering information:

ZH-3200-T X X X L
1 2 3 4 5

- 1 T=Terminal
2 Plated:
T=Tin G=Gold
3 Plated Method:
A: Plated before stamping
B: Stamping before plated
4 Material:
□BRASS
P:Phosphor bronze
5 L:#16~20

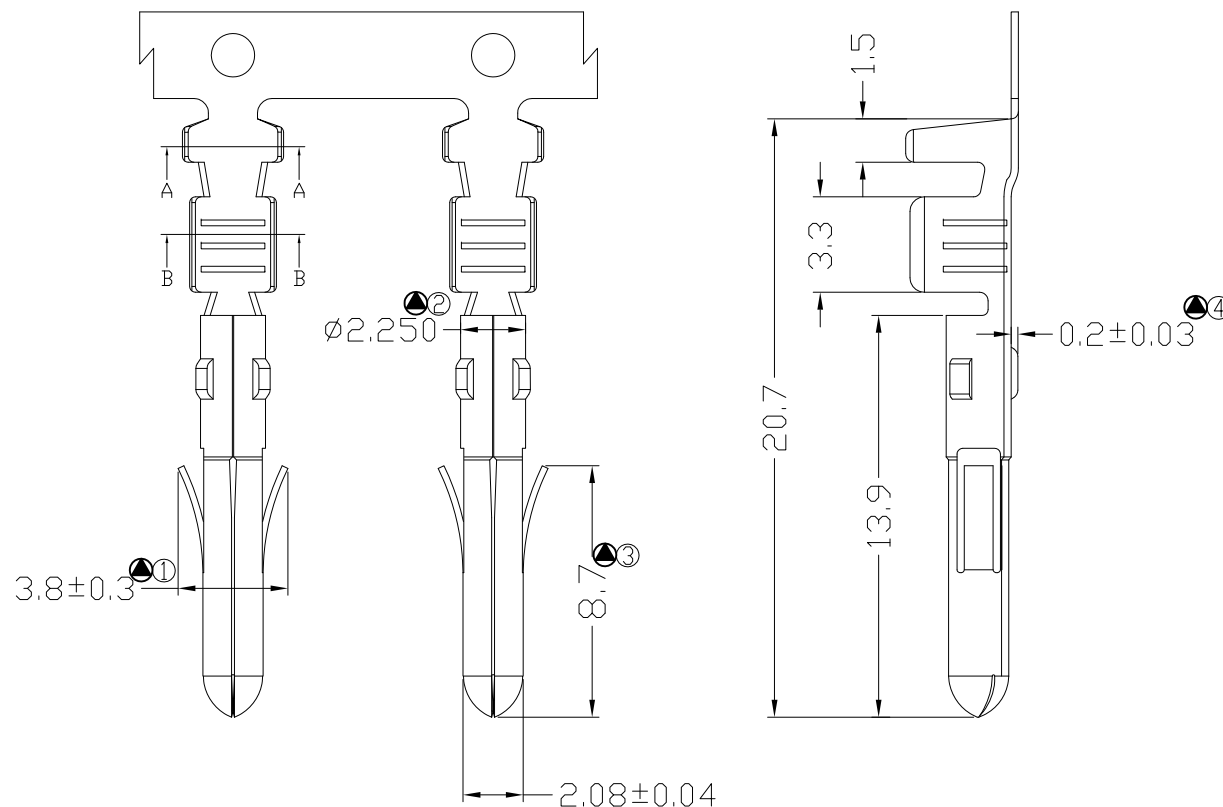

标示“”的需重点管控尺寸

TOLERANCE		ZH Connector Zen High Precision Industrial Ltd			
X.	--	TITLE 5.08mm (.200") Pitch Crimp Terminal			
X.X	±0.25				
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR	--				
APPROVALS					
DRAWN	TOMA	VIEW	SCALE	PART NO.	REV.
28-JUL-2013			1:1	ZH-3200-TXXXL	AO
CHECKED		UNIT	SIZE	DWG NO.	SHEET
APPROVED		MM	A4	TB1-130704	1 OF 1

