


RoHS2.0 compliant

REV	DATE	MODIFY

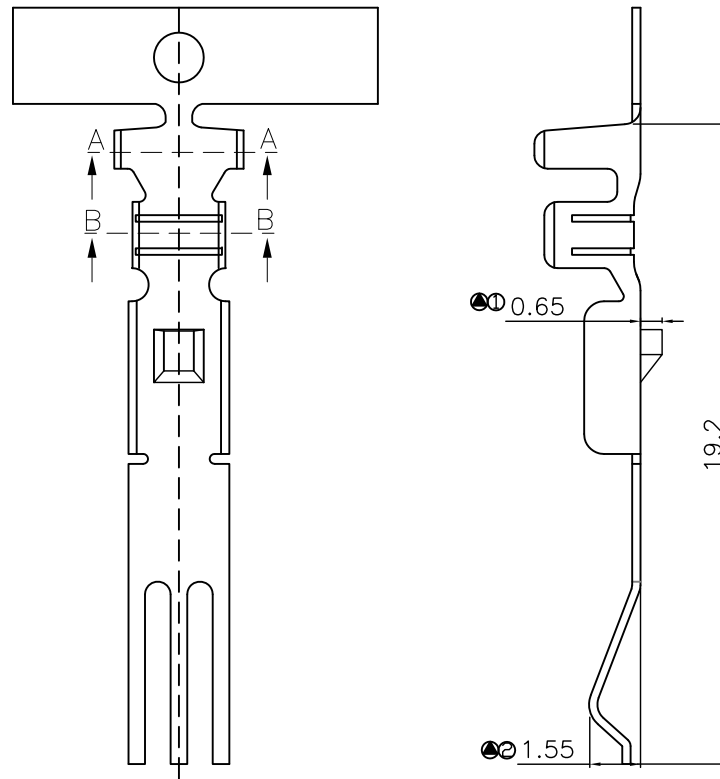

Features:



- * Used in ZH-A1271-H Series Housing
- * Accepts AWG #18~22 Wire Range
- * Insulation O.D.= 2.1~1.6 mm
- * Material : Phosphor Bronze or Brass
- * Finish : Gold-Plated or Tin-Plated
- * Qty/Reel : 5,000 PCS
- * Thickness: 0.25mm

Ordering information:

ZH-A1271-TXXXS
1 2 3 4 5

- 1 T=Terminal
- 2 Plated:
T=Tin G=Gold H=Selective
- 3 Plated Method:
A: Plated before stamping
B: Stamping before plated
- 4 Material:
□BRASS
P:Phosphor bronze
- 5 S: 低脚

标示“”的尺寸需重点管控



TOLERANCE		 Zen High Precision Industrial Ltd.			
X.	--				
X.X	±0.20	TITLE 1.27mm (.050) Pitch SATA Power Cable Receptacle			
X.XX	±0.15				
X.XXX	±0.10				
ANGULAR	--				
APPROVALS		VIEW			
DRAWN	TOMA		SCALE	PART NO.	REV.
	25-OCT-2016		F	ZH-A1271-TXXXS	A0
CHECKED		UNIT	SIZE	DWG NO.	SHEET
		MM	A4	T18-161024	1 OF 1
APPROVED					