
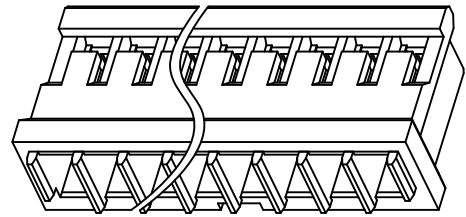




RoHS2.0 compliant

REV	DATE	MODIFY

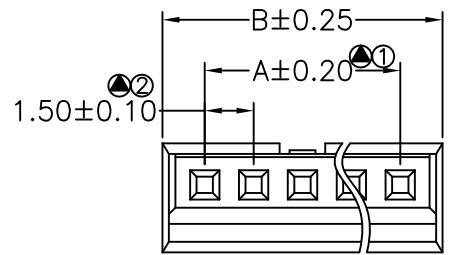

Features:


- * Available in 02 through 15 Circuits
- * Material: Nylon 66 UL94V-0
- * Accepts ZH-1161-T Crimp Terminal
- * Color: Natural(White)

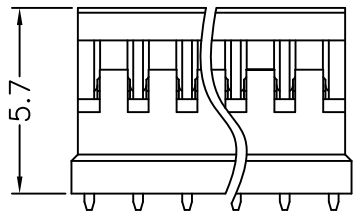

Ordering information:

ZH-1161-H XX
1 2

- 1 H=Housing
2 No. of Circuits 02~15

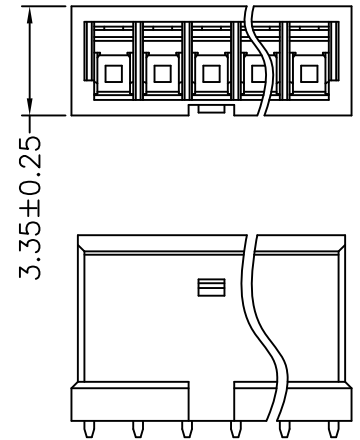

Circuits	Dimension mm	
	A	B
2	1.50	4.10
3	3.00	5.60
4	4.50	7.10
5	6.00	8.60
6	7.50	10.10
7	9.00	11.60
8	10.50	13.10
9	12.00	14.60
10	13.50	16.10
11	15.00	17.60
12	16.50	19.10
13	18.00	20.60
14	19.50	22.10
15	21.00	23.60

标示“●”的尺寸需重点管控

TOLERANCE		ZH Connector Zen High Precision Industrial Ltd			
X.	--	TITLE 1.50mm (.059") Pitch Housing			
X.X	±0.25				
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR	--				
APPROVALS					
DRAWN	TOMA	VIEW	SCALE	PART NO.	REV.
19-OCT-2018			1:1	ZH-1161-HXX	A0
CHECKED		UNIT	SIZE	DWG NO.	SHEET
APPROVED		MM	A4	HXX-181011	1 OF 1



RoHS2.0 compliant

REV	DESCRIPTION	DATE

Features:

- * Used in ZH-1161-HXX Series Housing
- * Accepts AWG #24~#30 Wire
- * Insulation O.D.= 1.10 mm(max)
- * Material : Phosphor Bronze
- * Finish : Ni:15~30u" Sn:40~60u"
- * Qty/Reel : 10,000 PCS
- * Thickness: 0.15mm

Ordering information:




ZH-1161-T T X P
1 2 3 4

1 T=Terminal


2 Plated:
T=Tin

3 Plated Method:
A: Plated before stamping
B: Stamping before plated


4 Material:
P:Phosphor bronze

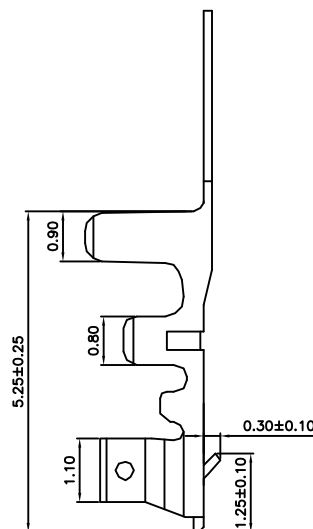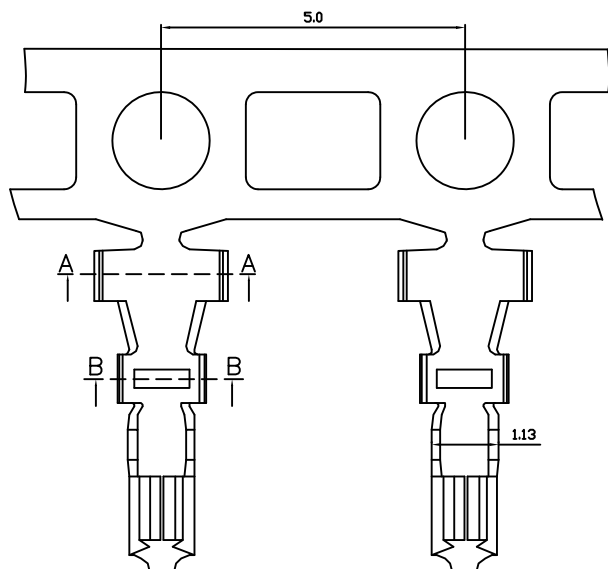

A-A



B-B



TOLERANCE		 Zen High Precision Industrial Ltd		
X.	--			
X.X	±0.25			
X.XX	±0.15			
X.XXX	±0.05			
ANGULAR	--			
APPROVALS		TITLE		
DRAWN	TOMA	VIEW	SCALE	PART NO.
	17-JAN-2018		1:1	ZH-1161-TTXP
CHECKED		UNIT	SIZE	DWG NO.
		mm	A4	TXX-180112
APPROVED				REV.
				A0
				SHEET
				1 OF 1