


RI E363554

RoHS2.0 compliant

REV	DATE	MODIFY
A1	2022/3/8	TOMA

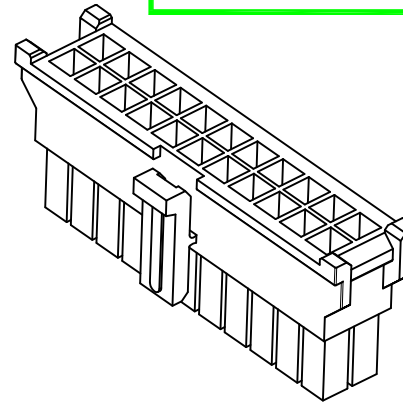

Electrical characteristics (电气特性)

Rated Voltage/额定电压:300V AC,DC
Withstand Voltage/耐压:1000V/AC/minute
Insulation Resistance/绝缘阻抗:1000M Ohms/min
Temperature Range/工作温度:-25°C~+85°C

Features:(产品特征)

Available in 22 Circuits/22 Pin
Material/材质: Nylon 66 UL94V-0 HF/无卤
Accepts/使用 ZH-5750-T Crimp terminal
Mates with/配合 ZH-5950-W22S or
ZH-5950-W22R or ZH-5850-H22 housing
Coloe:Black/黑色





Ordering information (编码说明)

ZH-5750-HW22M2Q
1 2 3 4 5


- 1 H=Housing
2 W:With the dust cover / 配置防尘盖系列
3 No. of Circuits 22 / 22 Pin
4 M2: Main part / 前后出线主体 2版
5 Q: Nylon 66 UL94V-0 HF/无卤

Notes(备注)

The dimension marked "▲" must be recorded
The dimensions marked "●" shall be checked
标示 "▲" 的尺寸必须记录检验数据, 标示 "●" 的尺寸重点确认

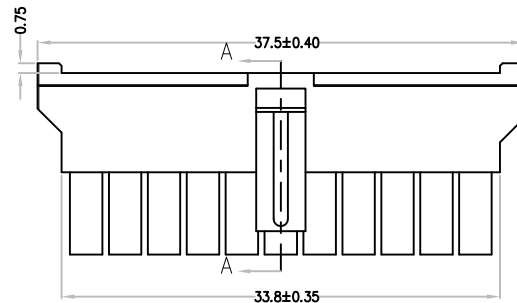

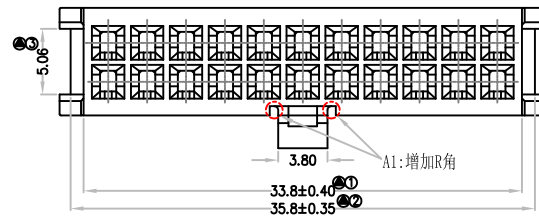


SECTION A-A

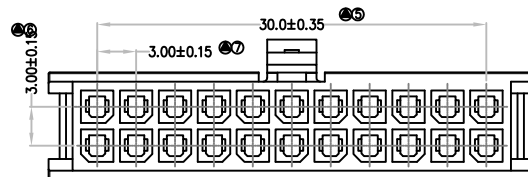

TOLERANCE		 Zen High Precision Industrial Ltd			
X.	--	TITLE 3.0mm(.118") Pitch Housing			
X.X	±0.25				
X.XX	±0.15				
X.XXX	±0.05				
ANGULAR	--				
APPROVALS		VIEW	SCALE	PART NO.	REV.
DRAWN	TOMA		1:1	ZH-5750-HW22M2Q	A1
CHECKED	11-APR-2020				
APPROVED		UNIT	SIZE	DWG NO.	SHEET
		MM	A4	HB2-200411	1 OF 1

REV	DATE	MODIFY

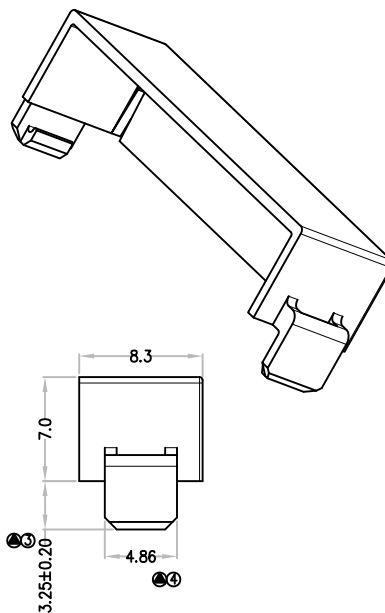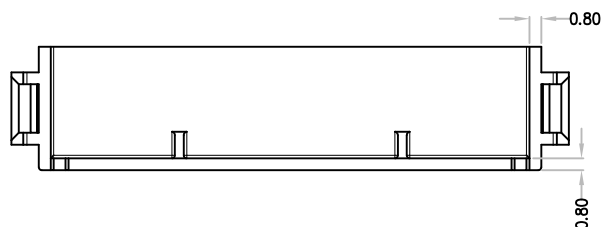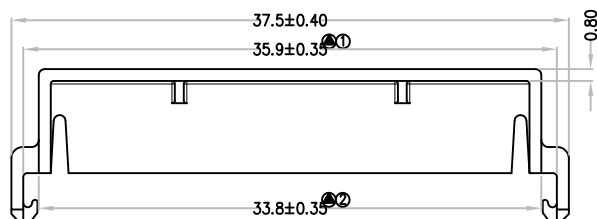

Electrical characteristics(电气特性)

Temperature Range/工作温度: -25°C~+85°C

Features: (产品特征)

Available in 22 Pin dust cover/22P 防尘盖
Material/材质: Nylon 66 UL94V-0 HF/无卤
Accepts/使用: ZH-5750-HW22M2Q housing
Coloe:Black/黑色

Ordering information (编码说明)

ZH-5750-H W 22 C2 Q
1 2 3 4 5

- 1 H=Housing
- 2 W:With the dust cover / 配置防尘盖系列
- 3 No. of Circuits 22 / 22 Pin
- 4 C2: Dust cover/前后出线防尘盖 2版
- 5 Q: Nylon 66 UL94V-0 HF/无卤

Notes(备注)

The dimension marked "▲" must be recorded
The dimensions marked "●" shall be checked
标示 "▲" 的尺寸必须记录检验数据, 标示 "●" 的尺寸重点确认



TOLERANCE		ZH Connector Zen High Precision Industrial Ltd		
X.	--			
X.X	±0.25			
X.XX	±0.15			
X.XXX	±0.05			
ANGULAR	--			
APPROVALS		TITLE		
DRAWN TOMA		3.0mm(.118") Pitch Dust Cover		
11-APR-2020		VIEW	SCALE	PART NO.
CHECKED		UNIT	SIZE	ZH-5750-HW22C2Q
APPROVED		MM	A4	HB2-200412
				REV. A0
				SHEET 1 OF 1